



# SUPERWINCH

## 2012 Product Guide



*Electric and  
Hydraulic Winches,  
Mounting Systems, Power Drives,  
Wireless Systems & Winch Accessories*

**Designed, Engineered & Built by Superwinch®**



**A Legacy of  
Solutions**



Forty one years ago in the northeast hills of Connecticut, Frank Tolsdorf, entrepreneur and marketing extraordinary, began manufacturing Superwinch electric winches. The corporate philosophy was to offer the end-user the most reliable, highest performing winching products all designed via problem solving innovation and from an organization dedicated to customer service.

The company's history began in 1968 when Frank was an executive with Indian Head Corporation. As marketing director, his responsibilities included new product development. So, when two Ford engineers came to him with an offer to sell the patents and manufacturing rights of an electric winch, Frank analysed the market and realized that there were exceptional opportunities in this field. On Frank's recommendation, Indian Head purchased Superwinch.

Detroit Gasket, the division which had product development responsibilities for Indian Head, redesigned the winch and introduced it to the public in 1969. Frank was not totally captivated with the product and just when he recognized what corrections had to be made, Indian Head told Frank to sell the product line. Frank realized that if he owned the company, he would be able to make whatever changes he felt necessary. Frank contacted the president of the supplier of the cable used on Superwinch, and together, they purchased the company. Superwinch originally offered a complete line of winches for the pleasure boating market. The marine line included the small electric winches the Haulamatic which loaded boats up to 8,000 lbs and a powered capstan called the Windlass.

A great many things changed for Superwinch over the next 15 years, including the development of satellite TV dish positioning systems. Ian Dodds, an aerospace engineer, joined Frank Tolsdorf in 1985. Collectively, they continued to bring innovation and quality to the winch industry. Superwinch purchased the New England-based Mercury Electric Winch and FW Winches Limited, located in Tavistock, UK (formerly Fairey Winches), providing additional winch manufacturing capabilities including an overdrive transfer gearbox for the Toyota Land Cruiser and a capstan winch for the Land Rover 110. Over three million winches later, today's global Superwinch team led by President & CEO Ned Cunningham, is as dedicated as ever to building on that philosophy with the introduction of the Tiger Shark, Entry Level LT/LP Series, the Terra ATV/UTV Series, and now the game changing Talon Series.

Superwinch's global manufacturing facilities have grown to design and produce a broad range of winches from electric 12, 24, and 115 volt planetary gear, right angle gear and worm gear units, to hefty hydraulic workhorses. Our 1,000 to 50,000 pound capacity winches can be found in diverse industries and applications around the world. These products share Superwinch's common traits of first class design, quality, value, and solid construction for safe, simple, and reliable operation.

*No resting on laurels at Superwinch. Our "Get Serious" campaign means just that we: are serious about continuous improvements, innovative design and timely market response to keep Superwinch, our OE, distribution partners, and the winch end user on top. We provide the greatest value proposition in the global winch industry: innovation, function, quality, price, and service. That is the Superwinch tradition.*





# Index



Winch Series	Capacity Range	Application	Pages
Talon Series	9,500 - 12,500	Heavy-Duty Recovery	3 - 8
Rock 98	9,800	Recovery, Off Road, Rock Crawler	6
Talon Heavy Series	14,000 - 18,000	Heavy-Duty Recovery	9 - 11
Talon Pro Series	(35 kN - 60 kN)	Heavy-Recovery (European Specifications)	12
Husky 8.5 and 10 Series	8,500 & 10,000	Heavy-Duty Recovery	13, 15
Large X Series	9,000	Heavy-Duty Recovery	16
Tiger Shark Series	9,500 -13,500	Recovery, Off-Road, & Utility	17 - 18
Tiger Shark Large Series	15,500 -17,500	Recovery, Off-Road, & Utility	19 - 20
S Winch	3,000 - 5,000	High Performance Trailer	21 - 24
Danny O'Day S Winch	6,400 rolling weight	High Performance Trailer	23
Original X Series	1,000 - 4,000	Commercial, Industrial	25, 26
GP Series	2,300 - 3,000	General Purpose Utility	27
LT Series, UT Series	2,000 - 3,000	Entry Level Utility	28
Terra	2,500 - 4,500	ATV and Side by Side	29 - 32
LT Series	2,000 - 3,000	Entry Level ATV	33
Winch-In-A-Bag	2,000 - 2,500	Entry Level Self-Recovery Winch	34
Crane Series	1,000	For Safely Moving and Lifting Materials	35, 36
AC Series	1,000 - 3,000	When AC Power is the Only Option	37, 38
Power Drives	N/A	Commercial, Industrial	39, 40
Sepson	27,000 -100,000	Military, Heavy Recovery	41 - 42
Hydraulic Series	8,000 - 50,000	Commercial, Industrial	43 - 50
Hubs		Most Popular 4WD Applications	51
LP Series	8,500 - 10,000	Entry Level Recovery & Utility	52
Mounting Solutions		Recovery Winch Mount	53
ATV Mounting Solutions		ATV & Side - by - Side Mount Kits	54
Cradle Mounting Kits		Recovery, Trailer, Utility, Mount Kits	55
Supermount Applications		Trucks, SUV and Off-Road	56
Accessories & Replacement Parts		All Winch Series	57 - 60
Warranties		All Winch Series	61
Jeep Jamboree U.S.A.		Superwinch Sponsor	62
Bill Burke		Winching expert	63
Bruce Elfstrom		Winching expert	64
Danny O'Day		Superwinch Sponsored	65
Get Serious with Superwinch		Advertisement	66



Superwinch LLC. Dayville, CT USA

Superwinch LTD - Tavistock, UK






## AKA The Winch of Prey Designed and Engineered by Superwinch



1. This is the industry's best truly sealed vehicle recovery winch assembly. All seals on the entire winch from the outermost end of the high performance motor, to the 2-stage planetary and 2 stage spur gearbox, to our ground breaking solenoid, meet the IP67 standard.
2. Sealed 5.2 HP and 6.0 HP motors deliver a quick but safe 62 FPM line speed at a low 75 Amp draw. Heat sink styled motor cap maintains low temperatures under the heaviest loads.
3. Innovative "Dual-Stop" 100% load-holding brake design provides zero drag on cable in. Located inside the gearbox away from the drum to eliminate heat transfer to the synthetic rope.
4. Special steel drum constructed with high tensile strength material to resist the unique loading characteristic of the optional 3/8" x 80' synthetic rope rated at 17,600 lbs ensures a safe pull.
5. Laser etched aerodynamically-shaped extruded aluminum tie bars reduce weight. Three (3) tie bar construction adds strength and structural rigidity between drum supports.
6. Chrome plated aluminum ergonomic free spool knob lifts and turns effortlessly. Easily rotates in 45° increments for custom applications and "in bumper" applications.
7. Ergonomically shaped, hand-held remote with brilliant LED light assists in night-time winching.
8. Coiled cord extends to 15', retracts to 4', and includes strap to contain unit for storage. Connects to winch with military style twist-lock plug, sealed to keep the elements out.
9. VS4 Solenoid (Vented, Submersible, and Stabilized with Sealed Socket) is simply the best winch solenoid in the world. Located inside a modern styled rugged enclosure
10. Solenoid meets IP67 standard, which ensures to keep out water, mud, snow, and dust. Venting feature allows the contacts to resist water and release contact damaging internal condensation.
11. Tri-bar bracket includes steel lined rubber insulated mounts to stabilize solenoid, reduce vibration and fatigue. Automotive-style sealed plug ensures a corrosion free connection.
12. Covered by a Limited Lifetime Warranty which includes an industry-first 3-year warranty on all electrical components, the absolute BEST in the INDUSTRY!

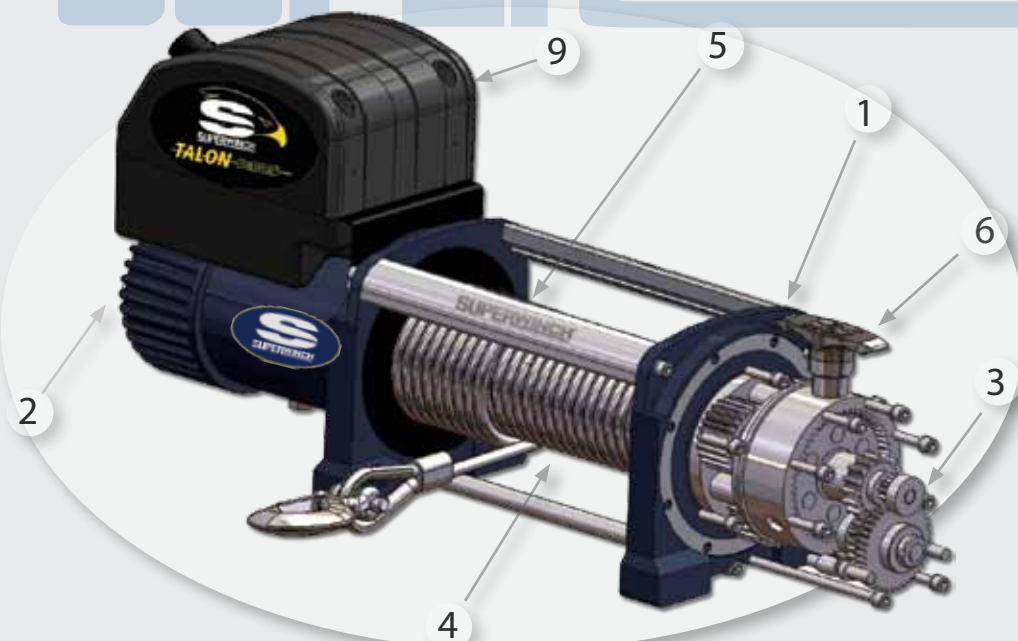

NEVER USE A WINCH TO SUSPEND A LOAD, NEVER USE A WINCH TO LIFT OR MOVE PEOPLE



# TALON 9.5



# TALON 9.5 SR

**Part Number:** 1695200 12VDC (1695300 24VDC)  
**Application:** Vehicle Recovery/Off Road/Truck/SUV

## Specifications

- Rated Line Pull: 9,500 lbs (4,309 kg)
- Motor: Sealed 5.2 hp (3.8 kW) Series Wound
- Gearing: 2-Stage Planetary & 2-Stage Spur
- Gear Ratio: 148:1
- Vented, Sealed Submersible Solenoid with 3-Year Warranty
- Freespooling Clutch: Pull and Turn
- Brake: Automatic/100% Load Holding (outside of drum)
- Wire Rope 3/8" x 85' (9.5mm x 26m)
- Hook: Heavy Duty/Clevis Pinned/Latched
- Heavy Duty 4-Way Roller Fairlead with Stainless Steel Rollers
- Remote: 15' Sealed Ergonomic Hand-Held w/Coiled Cord
- Dimensions: 24.22" L x 6.20" D x 10.95" H  
 (615.2mm L x 157.5mm D x 278.15mm H)
- Drum Diameter: 2.5" (63.5mm)
- Drum Length: 8.75" (222.2mm)
- Mounting Bolt Pattern: 10" x 4.5" (254mm x 114.3mm)
- Installed Weight: 90 lbs (41 kgs)
- Shipping Weight: 103 lbs (47 kgs)
- Limited Lifetime Warranty/3-Year Electrical
- UPC 0 22705 16912 7

## Performance (First layer on drum)

Line Pull lb (kg)	Motor Amps	Line Speed FPM (MPM)
0	75	62 (18.9)
9,500 (4,309 kgs)	430	5.0 (1.5)

**Part Number:** 1695201 12VDC (1695301 24VDC EU/UK only)  
**Application:** Vehicle Recovery/Off Road/Truck/SUV

## Specifications

- Rated Line Pull: 9,500 lbs (4,309 kg)
- Motor: Sealed 5.2 hp (3.8 kW) Series Wound
- Gearing: 2-Stage Planetary & 2-Stage Spur
- Gear Ratio: 148:1
- Vented, Sealed Submersible Solenoid with 3-Year Warranty
- Freespooling Clutch: Pull and Turn
- Brake: Automatic/100% Load Holding (outside of drum)
- Synthetic Rope 3/8" x 80' (9.5mm x 24.4m)
- Hook: Heavy Duty/Clevis Pinned/Latched
- Hawse: Anodized Blue Aluminium
- Remote: 15' Sealed Ergonomic Hand-Held w/Coiled Cord
- Dimensions: 24.22" L x 6.20" D x 10.95" H  
 (615.2mm L x 157.5mm D x 278.15mm H)
- Drum Diameter: 2.5" (63.5mm)
- Drum Length: 8.75" (222.2mm)
- Mounting Bolt Pattern: 10" x 4.5" (254mm x 114.3mm)
- Installed Weight: 65 lbs (30 kgs)
- Shipping Weight: 78 lbs (35 kgs)
- Limited Lifetime Warranty/3-Year Electrical
- UPC 0 22705 16913 4

## Performance (First layer on drum)

Line Pull lb (kg)	Motor Amps	Line Speed FPM (MPM)
0	75	62 (18.9)
9,500 (4,309 kgs)	430	5.0 (1.5)



# TALON 9.5i



# TALON 9.5i SR

**Part Number:** 1695210 12VDC (1695310 24VDC)

**Application:** Vehicle Recovery/Off Road/SUV

## Specifications

- Rated Line Pull: 9,500 lbs (4,309 kg)
- Motor: Sealed 5.2 hp (3.8 kW) Series Wound
- Gearing: 2-Stage Planetary & 2-Stage Spur
- Gear Ratio: 148:1
- Vented, Sealed Submersible Solenoid with 3-Year Warranty
- Freespooling Clutch: Pull and Turn
- Brake: Automatic/100% Load Holding (outside of drum)
- Wire Rope 3/8" x 85' (9.5mm x 26m)
- Hook: Heavy Duty/Clevis Pinned/Latched
- Heavy Duty 4-Way Roller Fairlead with Stainless Steel Rollers
- Remote: 15' Sealed Ergonomic Hand-Held w/Coiled Cord
- Dimensions: 24.22" L x 6.20" D x 10.66" H  
(615.2mm L x 157.5mm D x 270.75mm H)
- Drum Diameter: 2.5" (63.5mm)
- Drum Length: 8.75" (222.2mm)
- Mounting Bolt Pattern: 10" x 4.5" (254mm x 114.3mm)
- Installed Weight: 92 lbs (42 kg)
- Shipping Weight: 105 lbs (48 kg)
- Limited Lifetime Warranty/3-Year Electrical
- UPC 0 22705 16914 1

## Performance (First layer on drum)

Line Pull lb (kg)	Motor Amps	Line Speed FPM (MPM)
0	75	62 (18.9)
9,500 (4,309)	430	5.0 (1.5)

**Part Number:** 1695211 12VDC (1695311 24VDC- EU/UK only)

**Application:** Vehicle Recovery/Off Road/SUV

## Specifications

- Rated Line Pull: 9,500 lbs (4,309 kg)
- Motor: Sealed 5.2 hp (3.8 kW) Series Wound
- Gearing: 2-Stage Planetary & 2-Stage Spur
- Gear Ratio: 148:1
- Vented, Sealed Submersible Solenoid with 3-Year Warranty
- Freespooling Clutch: Pull and Turn
- Brake: Automatic/100% Load Holding (outside of drum)
- Synthetic Rope 3/8" x 80' (9.5mm x 24.4m)
- Hook: Heavy Duty/Clevis Pinned/Latched
- Hawse: Anodized Blue Aluminum
- Remote: 15' Sealed Ergonomic Hand-Held w/Coiled Cord
- Dimensions: 24.22" L x 6.20" D x 10.66" H  
(615.2mm L x 157.5mm D x 270.75mm H)
- Drum Diameter: 2.5" (63.5mm)
- Drum Length: 8.75" (222.2mm)
- Mounting Bolt Pattern: 10" x 4.5" (254mm x 114.3mm)
- Installed Weight: 67 lbs (30 kg)
- Shipping Weight: 80 lbs (36 kg)
- Limited Lifetime Warranty/3-Year Electrical
- UPC 0 22705 16915 8

## Performance (First layer on drum)

Line Pull lb (kg)	Motor Amps	Line Speed FPM (MPM)
0	75	62 (18.9)
9,500 (4,309)	430	5.0 (1.5)





**Part Number:** 1698201 12V DC (1698301 24VDC- EU/UK only)

**Application:** Vehicle Recovery/Off Road/Rock Crawler

### Specifications

- Rated Line Pull: 9,800 lbs (4,445 kg)
- Motor: Sealed 5.2 hp (3.8 kW) Series Wound
- Gearing: 2-Stage Planetary & 2-Stage Spur
- Gear Ratio: 148:1
- Vented, Sealed Submersible Solenoid with 3 year warranty
- Freespooling Clutch; Pull and Turn
- Brake: Automatic/100% Load Holding (outside of drum)
- Synthetic Rope 3/8" x 50' (9.5mm x 15.24m)
- Hook: Heavy Duty/Clevis Pinned/Latched/Yellow
- Hawse: Blue Anodized Aluminium
- Remote: 15' Sealed Ergonomic Hand-Held w/Coiled Cord
- Dimensions: 20.22" L x 6.2" D x 10.95" H  
(513.60mm L x 157.50mm D x 278.15mm H)
- Drum Diameter: 2.5" (63.5mm)
- Drum Length: 4.75" (120.75mm)
- Mounting Bolt Pattern: 6" x 4.5" (152.4mm x 114.3mm)
- Installed Weight: 62 lbs (28 kg)
- Shipping Weight: 75 lbs (34 kg)
- Limited Lifetime Warranty/3-Year Electrical
- UPC : 0 22705 16919 6

### Performance (First layer on drum)

Line Pull lbs (kg)	Motor Amps	Line Speed FPM (MPM)
0	75	62 (18.9)
9,800 (4,445)	445	4.8 (1.46)



### 9,800 lbs of pulling power in a small, lightweight package!

- Weighs 28 lbs less with Dyneema™ synthetic rope
- 4" narrower for smaller modified competition vehicles
- Free-spool knob rotates in 45° increments for custom applications
- Industrial grade, oversized, safety yellow latched hook
- Three solenoid box installation options
  - \* Offset (solenoid over motor, as shipped)
  - \* Centerline (solenoid over drum, kit included)
  - \* Competition (solenoid remotely mounted, kit included)

### MOUNTING OPTIONS



Competition (box remotely mounted, kit included)



Center line (box over drum, kit included)





# TALON 12.5



# TALON 12.5 SR

**Part Number:** 1612200 12VDC (1612300 24VDC EU/UK only)

**Application:** Vehicle Recovery/Off Road/ Truck & Trailer

## Specifications

- Rated Line Pull: 12,500 lbs (5,670 kg)
- Motor: Sealed 6.0 hp (4.48 kW) Series Wound
- Gearing: 2-Stage Planetary & 2-Stage Spur
- Gear Ratio: 148:1
- Vented, Sealed Submersible Solenoid with 3-Year Warranty
- Freespooling Clutch: Pull and Turn
- Brake: Automatic/100% Load Holding (outside of drum)
- Wire Rope 3/8" x 85' (9.5mm x 26m)
- Hook: Heavy Duty/Clevis Pinned/Latched
- Heavy Duty 4-way Roller Fairlead with Stainless Steel Rollers
- Remote: 15' Sealed Ergonomic Hand-Held w/ Coiled Cord
- Dimensions: 24.57" L x 6.2" D x 10.95" H  
(624.2mm L x 157.5mm D x 278.15mm H)
- Drum Diameter: 2.5" (63.5mm)
- Drum Length: 8.75" (222.25mm)
- Mounting Bolt Pattern: 10" x 4.5" (254mm x 114.3mm)
- Installed Weight: 94 lbs (42 kg)
- Shipping Weight: 107 lbs (48 kg)
- Limited Lifetime Warranty/3-Year Electrical
- UPC 0 22705 16900 4

## Performance (First layer on drum)

Line Pull lb (kg)	Motor Amps	Line Speed FPM (MPM)
0	75	62 (18.89)
12,500 (5,670)	530	3.25 (0.99)

**Part Number:** 1612201 12VDC (1612301 24VDC EU/UK only)

**Application:** Vehicle Recovery/Off Road /Truck &Trailer

## Specifications

- Rated Line Pull: 12,500 lbs (5,670 kg)
- Motor: Sealed 6.0 hp (4.48 kW) Series Wound
- Gearing: 2-Stage Planetary & 2-Stage Spur
- Gear Ratio: 148:1
- Vented, Sealed Submersible Solenoid with 3-Year Warranty
- Freespooling Clutch: Pull and Turn
- Brake: Automatic/100% Load Holding (outside of drum)
- Synthetic Rope 3/8" x 80' (9.5mm x 24.4m)
- Hook: Heavy Duty/Clevis Pinned/Latched
- Hawse: Blue Anodized Aluminium
- Remote: 15' Sealed Ergonomic Hand-Held w/ Coiled Cord
- Dimensions: 24.57" L x 6.2" D x 10.95" H  
(624.2mm L x 157.5mm D x 278.15mm H)
- Drum Diameter: 2.5" (63.5mm)
- Drum Length: 8.75" (222.25mm)
- Mounting Bolt Pattern: 10" x 4.5" (254mm x 114.3mm)
- Installed Weight: 68 lbs (31 kg)
- Shipping Weight: 81 lbs (37 kg)
- Limited Lifetime Warranty/3-Year Electrical
- UPC 0 22705 16901 1

## Performance (First layer on drum)

Line Pull lb (kg)	Motor Amps	Line Speed FPM (MPM)
0	75	62 (18.89)
12,500 (5,670)	530	3.25 (0.99)



# TALON 12.5i



# TALON 12.5i SR

**Part Number:** 1612210 12VDC (1612310 24VDC)

**Application:** Vehicle Recovery/Off Road/Truck & Trailer

## Specifications

- Rated Line Pull: 12,500 lbs (5,670 kg)
- Motor: Sealed 6.0 hp (4.48 kW) Series Wound
- Gearing: 2-Stage Planetary & 2-Stage Spur
- Gear Ratio: 148:1
- Vented, Sealed Submersible Solenoid with 3-Year Warranty
- Freespooling Clutch: Pull and Turn
- Brake: Automatic/100% Load Holding (outside of drum)
- Wire Rope 3/8" x 85' (9.5mm x 26m)
- Hook: Heavy Duty/Clevis Pinned/Latched
- Heavy Duty 4-way Roller Fairlead w/Stainless Steel Rollers
- Remote: 15' Sealed Ergonomic Hand-Held w/Coiled Cord
- Dimensions: 24.57" L x 6.20" D x 10.66" H  
(624.2mm L x 157.50mm D x 270.76mm H)
- Drum Diameter: 2.5" (63.5mm)
- Drum Length: 8.75" (222.25mm)
- Mounting Bolt Pattern: 10" x 4.5" (254mm x 114.3mm)
- Installed Weight: 95 lbs (43 kg)
- Shipping Weight: 108 lbs (48 kg)
- Limited Lifetime Warranty/3-Year Electrical
- UPC 0 22705 16902 8

## Performance (First layer on drum)

Line Pull lb (kg)	Motor Amps	Line Speed FPM (MPM)
0	75	62 (18.89)
12,500 (5,670)	530	3.25 (0.99)

**Part Number:** 1612211 12VDC (1612311 24VDC)

**Application:** Vehicle Recovery/Off Road/ Truck & Trailer

## Specifications

- Rated Line Pull: 12,500 lbs (5,670 kg)
- Motor: Sealed 6.0 hp (4.48 kW) Series Wound
- Gearing: 2-Stage Planetary & 2-Stage Spur
- Gear Ratio: 148:1
- Vented, Sealed Submersible Solenoid with 3-Year Warranty
- Freespooling Clutch: Pull and Turn
- Brake: Automatic/100% Load Holding (outside of drum)
- Synthetic Rope 3/8" x 80' (9.5mm x 24.4m)
- Hook: Heavy Duty/Clevis Pinned/Latched
- Hawse: Anodized Blue Aluminium
- Remote: 15' Sealed Ergonomic Hand-Held w/Coiled Cord
- Dimensions: 24.57" L x 6.20" D x 10.66" H  
(624.2mm L x 157.50mm D x 270.76mm H)
- Drum Diameter: 2.5" (63.5mm)
- Drum Length: 8.75" (222.25mm)
- Mounting Bolt Pattern: 10" x 4.5" (254mm x 114.3mm)
- Installed Weight: 70 lbs (31 kg)
- Shipping Weight: 83 lbs (37 kg)
- Limited Lifetime Warranty/3-Year Electrical
- UPC 0 22705 16903 5

## Performance (First layer on drum)

Line Pull lb (kg)	Motor Amps	Line Speed FPM (MPM)
0	75	62 (18.89)
12,500 (5,670)	530	3.25 (0.99)








## TALON HEAVY DUTY SERIES ADVANTAGE

Speed and power make our tough Talon Series winches ideal for recovery and super-duty applications. Available in 14,000 lbs and 18,000 lbs with either steel or synthetic ropes. These 2-stage planetary gear winches are packed with essential and extra practical features for efficient, reliable, and safe winching operations under the heaviest loads.



1. All seals on the entire winch from the outermost end of the high performance motor to the edge of the 2-stage planetary and 2 stage spur gearbox all meet the IP67 standard.
2. Fastest line speed in its class; sealed 5.2 HP and 6.0 HP motors deliver a quick 25 FPM line speed at a low 75 Amp draw.
3. Four-planet planetary gear sets for added strength and durability. Robust ball and roller bearing construction.
4. Steel drum supports for ultimate strength; can be mounted foot down or foot forward, versatility provides multiple industrial mounting options.
5. Innovative "Dual-Stop" 100% load holding brake design provides zero drag on cable in. Located inside the gearbox away from the drum to eliminate heat transfer to synthetic rope.
6. Covered by a Limited Lifetime Warranty which includes an industry first 3-year warranty on all electrical components, the absolute BEST in the INDUSTRY!
7. Chrome plated aluminum ergonomically free spool knob lifts and turns effortlessly. Easily rotates in 45° increments for commercial and industrial applications.
8. Ergonomically shaped hand-held sealed remote with brilliant LED light assists in late night job site or road side winching.
9. Coiled cord extends to 15' and retracts to 4'. Includes strap to contain unit for storage. Connects to winch with military style twist lock plug, sealed to keep elements out.
10. VS4 Solenoid (Vented, Submersible, and Stabilized Solenoid with Sealed Socket) is the best winch solenoid in the world. Venting feature allows solenoid to resist water and releases contact damaging internal condensation. Tri-bar bracket includes steel-lined rubber insulated mounts to stabilize solenoid, reduces vibration and fatigue.



NEVER USE A WINCH TO SUSPEND A LOAD, NEVER USE A WINCH TO LIFT OR MOVE PEOPLE



# TALON 14.0



# TALON 14.0 SR

**Part Number:** 1614200 12VDC (1612300 24VDC- EU/UK only)  
**Application:** Vehicle Recovery/Off Road/Commercial  
Truck & Trailer

## Specifications

- Rated Line Pull: 14,000 lbs (6,350 kg)
- Motor: Sealed 5.2 hp (3.8 kW) Series Wound
- Gearing: 2-Stage Planetary & 2-Stage Spur
- Gear Ratio: 346:1
- Vented, Sealed Submersible Solenoid with 3-Year Warranty
- Freespooling Clutch: Pull and Turn
- Brake: Automatic/100% Load Holding (outside of drum)
- Wire Rope 1/2" x 90' (13mm x 27.43m)
- Hook: Heavy Duty/Clevis Pinned/Latched
- Heavy Duty 4-way Roller Fairlead with Stainless Steel Rollers
- Remote: 15' Sealed Ergonomic Hand-Held w/ Coiled Cord
- Dimensions: 27.15" L x 8.46" D x 11.57" H  
(698.5mm L x 215.5mm D x 294.21mm H)
- Drum Diameter: 3.5" (88.9mm)
- Drum Length: 8.75" (222.25mm)
- Mounting Bolt Pattern: 10" x 4.5" (254mm x 114.3mm) & 10" x 6.5" (254mm x 165.1mm)
- Installed Weight: 170 lbs (77.1 kg)
- Shipping Weight: 183 lbs (83 kg)
- Limited Lifetime Warranty/3-Year Electrical
- UPC 0 22705 16904 2 / 0 22705 16906 6 (24V DC)

## Performance (First layer on drum)

Line Pull lb (kg)	Motor Amps	Line Speed FPM (MPM)
0	75	25 (7.62)
14,000 (6,350)	345	4.25 (1.29)



**Part Number:** 1614201 12VDC (1614301 24VDC- EU/UK only)  
**Application:** Vehicle Recovery/Off Road/Commercial  
Truck & Trailer

## Specifications

- Rated Line Pull: 14,000 lbs (6,350 kg)
- Motor: Sealed 5.2 hp (3.8 kW) Series Wound
- Gearing: 2-Stage Planetary & 2-Stage Spur
- Gear Ratio: 346:1
- Vented, Sealed Submersible Solenoid with 3-Year Warranty
- Freespooling Clutch: Pull and Turn
- Brake: Automatic/100% Load Holding (outside of drum)
- Synthetic Rope 1/2" x 90' (13mm x 27.43mm)
- Hook: Heavy Duty/Clevis Pinned/Latched / Yellow
- Hawse: Anodized Blue Aluminium
- Remote: 15' Sealed Ergonomic Hand-Held w/ Coiled Cord
- Dimensions: 27.15" L x 8.46" D x 11.57" H  
(698.5mm L x 215.5mm D x 294.21mm H)
- Drum Diameter: 3.5" (88.9mm)
- Drum Length: 8.75" (222.25mm)
- Mounting Bolt Pattern: 10" x 4.5" (254mm x 114.3mm) & 10" x 6.5" (254mm x 165.1mm)
- Installed Weight: 145 lbs (65.7 kg)
- Shipping Weight: 158 lbs (71.6 kg)
- Limited Lifetime Warranty/3-Year Electrical
- UPC 0 22705 16905 9

## Performance (First layer on drum)

Line Pull lb (kg)	Motor Amps	Line Speed FPM (MPM)
0	75	25 (7.62)
14,000 (6,350)	345	4.25 (1.29)



# TALON 18.0



# TALON 18.0 SR

**Part Number:** 1618200 12VDC (1618300 24VDC- EU/UK only)

**Application:** Vehicle Recovery/Off Road/Commercial

## Specifications

- Rated Line Pull: 18,000 lbs (8,165 kg)
- Motor: Sealed 6.0 hp (4.48 kW) Series Wound
- Gearing: 2-Stage Planetary & 2-Stage Spur
- Gear Ratio: 346:1
- Vented, Sealed Submersible Solenoid with 3-Year Warranty
- Freespooling Clutch: Pull and Turn
- Brake: Automatic/100% Load Holding (outside of drum)
- Wire Rope 1/2" x 90' (13mm x 27.43m)
- Hook: Heavy Duty/Clevis pinned/Latched
- Heavy Duty 4-way Roller Fairlead with Stainless Steel Rollers
- Remote: 15' Sealed Ergonomic Hand-Held w/ Coiled Cord
- Dimensions: 27.5" L x 8.46" D x 11.57" H  
(698.5mm L x 215mm D x 294.21mm H)
- Drum Diameter: 3.5" (88.9mm)
- Drum Length: 8.75" (222.25mm)
- Mounting Bolt Pattern: 10" x 4.5" (254mm x 114.3mm) & 10" x 6.5" (254mm x 165.1mm)
- Installed Weight: 172 lbs (78 kg)
- Shipping Weight: 185 lbs (83.9 kg)
- Limited Lifetime Warranty/3-Year Electrical
- UPC 0 22705 16907 3 / 0 22705 16910 3 (24V DC)

## Performance (First layer on drum)

Line Pull lbs (kg)	Motor Amps	Line Speed FPM (MPM)
0	75	25 (7.62)
18,000 (8,165)	415	2.5 (0.76)

**Part Number:** 1618201 12VDC (1618301 24VDC- EU/UK only)

**Application:** Vehicle Recovery/Industrial/Commercial

## Specifications

- Rated Line Pull: 18,000 lbs (8,165 kg)
- Motor: Sealed 6.0 hp (4.48 kW) Series Wound
- Gearing: 2-Stage Planetary & 2-Stage Spur
- Gear Ratio: 346:1
- Vented, Sealed Submersible Solenoid w/ 3-Year Warranty
- Freespooling Clutch: Pull and Turn
- Brake: Automatic/100% Load Holding (outside of drum)
- Synthetic Rope 1/2" x 90' (13mm x 27.43m)
- Hook: Heavy Duty/Latched / Yellow
- Hawse: Anodized Blue Aluminium
- Remote: 15' Sealed Ergonomic Hand-Held w/ Coiled Cord
- Dimensions: 27.5" L x 8.46" D x 11.57" H  
(698.5mm L x 215mm D x 294.21mm H)
- Drum Diameter: 3.5" (88.9mm)
- Drum Length: 8.75" (222.25mm)
- Mounting Bolt Pattern: 10" x 4.5" (254mm x 114.3mm) & 10" x 6.5" (254mm x 165.1mm)
- Installed Weight: 147 lbs (66 kg)
- Shipping Weight: 160 lbs (72.5 kg)
- Limited Lifetime Warranty/3-Year Electrical
- UPC 0 22705 16908 0

## Performance (First layer on drum)

Line Pull lbs (kg)	Motor Amps	Line Speed FPM (MPM)
0	75	25 (7.62)
18,000 (8,165)	415	2.5 (0.76)





**Part Number:** 61614001 12VDC (61614002 24VDC)

**Application:** Vehicle Recovery/Commercial/Industrial/Truck & Trailer

## Specifications

- Meets EU Spec EN 14492-1 (Available EU/UK only)
- Integrated Overload Limiter
- 10:1 D to d Ratio Rope Drum
- 2:1 Safety Factor Wire Rope
- Twin Hole Safety Feature for Wire Rope Attachment
- Safety Cover (TBA)
- Rated Line Pull: 34.9 kN (3,560 kg)
- Motor: Sealed 5.2 hp, (3.8 kW), Series Wound
- Gearing: 2-Stage Planetary and 2-Stage Spur
- Gear Ratio: 346:1
- Vented, Sealed Submersible Solenoid w/3-Year Warranty
- Freespooling Clutch: Pull and Turn
- Brake: Automatic/100% Load Holding (outside of drum)
- Wire Rope: 10mm x 30m
- Hook: Heavy Duty/Permanent/Latched
- Heavy Duty 4-way Roller Fairlead with Stainless Steel Rollers
- Remote: 15' Sealed Ergonomic Hand-Held w/Coiled Cord
- Dimensions: (698.5mm L x 215mm D x 294.2mm H)
- Drum Diameter: (90mm)
- Drum Length: (222mm)
- Mounting Bolt Pattern: 10" x 4.5" (254mm x 114.3mm)
- Installed Weight: 170 lbs (77.1 kg)
- Shipping Weight: 183 lbs (83 kg)
- Limited Lifetime Warranty/3-Year Electrical

## Performance (First layer on drum)

Line Pull kN (kg)	Motor Amps	Line Speed FPM (MPM)
0	75	25 (7.62)
34.9 kN (3,560 kg)	345	4.25 (1.29)



**Part Number:** 61618001 12VDC (61618002 24VDC)


**Application:** Vehicle Recovery/Industrial/Commercial

## Specifications

- Meets EU Spec EN 14492-1 (Available EU/UK only)
- Integrated Overload Limiter
- 10:1 D to d Ratio Rope Drum
- 2:1 Safety Factor Wire Rope
- Twin Hole Safety Feature for Wire Rope Attachment
- Safety Cover (TBA)
- Rated Line Pull: 59 kN (6,018 kg)
- Motor: Sealed 6.0 hp (4.48 kW) Series Wound
- Gearing: 2-Stage Planetary and 2-Stage Spur
- Gear Ratio: 346:1
- Vented, Sealed Submersible Solenoid w/3-Year Warranty
- Freespooling Clutch: Pull and Turn
- Brake: Automatic/100% Load Holding (outside of drum)
- Wire Rope: 13mm x 30m
- Hook: Heavy Duty/Permanent Latched
- Heavy Duty 4-way Roller Fairlead with Stainless Steel Rollers
- Remote: 15' Sealed Ergonomic Hand-Held w/Coiled Cord
- Dimensions: (698.5mm L x 215mm D x 294.2mm H)
- Drum Diameter: (117mm)
- Drum Length: (205mm)
- Mounting Bolt Pattern: 10" x 4.5" (254mm x 114.3mm) & 10" x 6.5" (254mm x 165.1mm)
- Installed Weight: 172 lbs (78 kg)
- Shipping Weight: 185 lbs (83.9 kg)
- Limited Lifetime Warranty/3-Year Electrical

## Performance (First layer on drum)

Line Pull kN (kg)	Motor Amps	Line Speed FPM (MPM)
0	75	25 (7.62)
59 kN (6,018 kg)	415	2.5 (0.76)

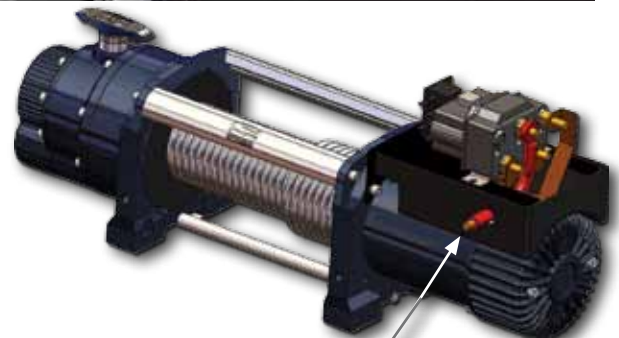

Integrated Limiting Module





## HUSKY & BILL BURKE SERIES ADVANTAGE



### High Performance Series - Extreme Duty Gear Winches

Designed and engineered in England for indestructibility, the Husky Series from Superwinch® contains a virtually indestructible worm and spur gear system. Synthetic rope friendly (worm gear drive will not degrade the synthetic rope). Back-drive resistance, load-holding brake system. Remote mountable solenoid housing. S3 Sealed, Submersible Solenoid with a 3-year warranty. Industrial grade 4.2 hp series wound motor. The Husky 10 is also available in 24VDC version.



NEVER USE A WINCH TO SUSPEND A LOAD, NEVER USE A WINCH TO LIFT OR MOVE PEOPLE

# HUSKY 8.5



# HUSKY 10

**Part Number:** 8514 12VDC (8515 24VDC, EU/UK only)

**Application:** Vehicle Recovery/Off Road Truck/Utility

## Specifications

- Rated Line Pull: 8,500 lbs (3,856 kg)
- Motor: Sealed 4.2 hp (3.13 kW) Series Wound
- Gearing: Worm Gear
- Gear Ratio: 229:1
- Metal Solenoid Assembly (EU/UK only)
- Freespooling Clutch: Lever Control
- Brake: Automatic, 100% Load Holding
- Wire Rope: *winch only, rope not supplied*
- Hook: Heavy duty Clevis with Latch (Permanant UK/EU)
- Fairlead: Heavy-Duty Roller with Secure Nuted Bolts
- Remote Control: 15' Sealed Hand-Held
- Dimensions: 24.69" L x 9.75" D x 8.8" H (627 mm L x 248 mm D x 220 mm H)
- Drum Diameter: 2.5" (63.5 mm)
- Drum Length: 9" (229 mm)
- Mounting Bolt Pattern: 10.8" x 4.92" (275 mm x 125 mm)
- Installed Weight: 112.9lbs (51.02 kg)
- Shipping Weight: 123.9lbs (56.2 kg)
- Limited Lifetime Warranty/1-year Solenoid
- UPC 0 22705 02408 2

## Performance (First layer on drum)

Line Pull lb (kg)	Motor Amps	Line Speed FPM (MPM)
0	62	22.6 (6.9)
8,500 (3,856)	450	1.5 (0.5)

**Part Number:** 2404 12VDC (2405 24VDC)

**Application:** Vehicle Recovery/Off Road Truck/SUV

## Specifications

- Rated Line Pull: 10,000 lbs (4,536 kg)
- Motor: Sealed 4.2 hp (3.13 kW) Series Wound
- Gearing: Worm Gear
- Gear Ratio: 294:1
- Sealed Submersible Solenoid (North America only)
- Freespooling Clutch: Lever control
- Brake: Automatic/100% Load Holding
- Wire Rope: 3/8" x 90' (9.5 mm x 27m)
- Hook: Heavy duty Clevis with Latch (Permanant UK/EU)
- Heavy Duty Roller Fairlead
- Remote Control: 15' Sealed Hand-held
- Dimensions: 24.69" L x 9.75" D x 8.8" H (617mm L x 248mm D x 223mm H)
- Drum Diameter: 3" (76mm)
- Drum Length: 9" (229mm)
- Mounting Bolt Pattern: 10.8" x 4.92" (275 mm x 125 mm)
- Installed Weight: 88 lbs (39.91 kg)
- Shipping Weight: 95 lbs (43.09 kg)
- Limited Lifetime Warranty/3-Year Solenoid
- UPC 0 22705 00303 2

## Performance (First layer on drum)

Line Pull lb (kg)	Motor Amps	Line Speed FPM (MPM)
0	62	22.6 (6.9)
10,000 (4,536)	450	1.5 (0.5)



Utility  
& Multi

4x4

CAMEL  
TROPHY  
SUPERWINCH





**Part Number:** 2404BB 12VDC

**Application:** Vehicle Recovery/Off Road /Truck/Utility

## Specifications

- Rated Line Pull: 10,000 lbs (4,536 kg)
- Motor: 4.2 hp (3.13 kW) Series Wound
- Gearing: Worm Gear
- Gear Ratio: 294:1
- Sealed Submersible Solenoid
- Freespooling Clutch: Lever control
- Brake: Automatic/100% Load Holding
- Synthetic Rope 3/8" x 80' (9.5mm x 24.4m)
- Hook: Heavy Duty/Clevis Pinned/Latched/Safety Yellow
- Heavy Duty Roller Fairlead
- Remote Control: 15' Sealed Hand-held
- Dimensions: 24.69" L x 9.75" D x 8.8" H  
(617mm L x 248mm D x 223mm H)
- Drum Diameter: 3" (76mm)
- Drum Length: 9" (229mm)
- Mounting Bolt Pattern: 10" x 8" x 4.92" (275mm x125mm)
- Installed Weight: 88 lbs (39.91 kg)
- Shipping Weight: 95 lbs (43.09 kg)
- Limited Lifetime Warranty/3-Year Solenoid
- UPC 0 22705 00303 2

## Performance (First layer on drum)

Line Pull lb (kg)	Motor Amps	Line Speed FPM (MPM)
0	62	22.6 (6.9)
10,000 (4,536)	450	1.5 (0.5)



**Part Number:** 8552PRO 12VDC / 8553PRO 24VDC (UK/EU only)

**Application:** Vehicle Recovery/Off Road /Truck/Utility

## Specifications

- Rated Line Pull: 24.5kN (2,500 kg)
- Motor: 12VDC 1.9 hp (1.43 kW) / 24VDC 2.1 hp (1.60 kW)
- Gearing: Worm Gear
- Gear Ratio: 294:1
- Dual Metal Solenoid Pack
- Freespooling Clutch: Lever control
- Brake: Automatic/100% Load Holding
- Winch Only *rope not included*
- Hook: Heavy Duty /Latched Permanent
- Heavy Duty Roller Fairlead and Mount Plate
- Remote Control: 15' Sealed Hand-held
- Dimensions: 24.69" L x 9.75" D x 8.8" H  
(627mm L x 248mm D x 220mm H)
- Drum Diameter: 72mm
- Drum Length: 228mm
- Mounting Bolt Pattern: 275mm x125mm
- Installed Weight: 112.9 lbs (51.02 kg)
- Shipping Weight: 123.9 lbs (56.2 kg)
- Limited 1-year Warranty

## Performance (First layer on drum)

Line Pull lb (kg)	Motor Amps	Line Speed FPM (MPM)
0	55	22.6 (6.9)
10,000 (4,536)	240	1.5 (0.5)





**Part Number:** 1901C 12VDC (1902B 24V DC)  
**Application:** Vehicle Recovery/Off Road /Truck/Suv

### Specifications

- Rated Line Pull: 9,000 lbs (4,082 kg)
- Motor: 4.2 hp (3.13 kW) Series Wound
- Gearing: 3-Stage Planetary
- Gear Ratio: 253:1
- Remote Mount Solenoid Station with bracket
- Freespooling Clutch: 1/4 turn activation
- Brake: Automatic/100% Load Holding
- Wire Rope 5/16" x 100' (7.9mm x 30.5m)
- Hook: Heavy Duty/Clevis Pinned / Latched
- Heavy Duty 4 - way Roller Fairlead
- Remote Control: 15' Rubber Hand-Held
- Dimensions: 22.88" L x 6.75" D x 6.63" H  
(581mm L x 171mm x D x 168mm H)
- Drum Diameter: 2.5" (64mm)
- Drum Length: 9" (229mm)
- Mounting Bolt Pattern: 10" x 4.5" (254mm x 114.3mm)
- Installed Weight: 82 lbs (37 kg)
- Shipping Weight: 94.8 lbs. (43.0 kg)
- Limited Lifetime Warranty
- UPC: 0 22705 19022 0

### Performance (First layer on drum)

Line Pull lbs (kg)	Motor Amps	Line Speed FPM (MPM)
0	73	38.2 (11.6)
9,000 (4,082)	420	2.5 (.8)

**Part Number:** 1917 12VDC  
**Application:** Vehicle Recovery/Off Road/Truck/Suv

### Specifications

- Rated Line Pull: 9,000 lbs (4,082 kg)
- Motor: 4.2 hp (3.13 kW) Series Wound
- Gearing: 3-Stage Planetary
- Gear Ratio: 253:1
- Sealed Submersible Solenoid
- Freespooling Clutch: 1/4 turn activation
- Brake: Automatic /100% Load Holding
- Wire Rope 5/16" x 100' (7.9mm x 30.5m)
- Hook: Heavy Duty/Clevis Pinned / Latched
- Heavy Duty 4 - way Roller Fairlead
- Remote Control: 15' Rubber Hand-Held
- Dimensions: 23.56" L x 6.75" D x 9.56" H  
(598mm L x 171mm x D x 243mm H)
- Drum Diameter: 2.5" (64mm)
- Drum Length: 9" (229mm)
- Mounting Bolt Pattern: 10" x 4.5" (254mm x 114.3mm)
- Installed Weight: 84 lbs (38.10 kg)
- Shipping Weight: 96 lbs (43.54 kg)
- Limited Lifetime Warranty/3-Year Solenoid
- UPC: 0 227050 1917 0

### Performance (First layer on drum)

Line Pull lb (kg)	Motor Amps	Line Speed FPM (MPM)
0	73	38.2 (11.6)
9,000 (4,082)	420	2.5 (0.8)







# TIGER SHARK SERIES ADVANTAGE

## INTERMEDIATE PLANETARY GEAR WINCHES

*The "Entry Level" waters are dark, full of bottom feeders and are soon to be consumed by a winch series destined to raise the bar for the winch marketplace!*



*Superwinch is redefining the entry level winch market with the new Tiger Shark Series with "Standard Issue" features and benefits designed specifically for the enthusiast-level consumer. Created from everything we have learned over the past 40+ years, the Tiger Shark brings unmatched functionality, quality and value.*

**Here is what separates the Tiger Shark Series apart from the pretenders:**

- 9,500 lbs to 17,500 lbs of Rated Line Pull  
Five winches to bite almost any application
- Weather Sealed 5.2 HP to 6.5 HP Motors  
Reduces damage from rain, snow and blowing dust
- Heavy-Duty 3-Stage and 4-Stage Gearboxes  
Handles stress and torque on demand
- Heavy-Duty Drum Supports  
Load tested all the way to stall
- Weather Sealed Solenoids  
Reduces damage from rain, snow and blowing dust
- Severe-Duty Textured Finish  
Resists harsh outdoor and off-road abuse
- Heavy-Duty Rubber Hand-held Remote  
Field proven design provides effortless switching
- Stainless Steel Tie Bars and Hardware  
Great appearance & resists damage from rain and snow
- Heavy-Duty Fairlead with Stainless Steel Rollers  
Brushed finish endures weather and wire rope abuse
- Ergonomically Shaped Freespool Control  
Easy to grip and effortless to operate



***Here is what you get from the pretenders:***

- Inaccurate performance & endurance data
- Inferior components & materials
- False claims regarding J706 Standard





# TIGER SHARK 9500



# TIGER SHARK 11500

**Part Number:** 1595200 12VDC

Application: Vehicle Recovery/Off Road/Utility

## Specifications

- Rated Line Pull: 9,500 lbs (4,309 kg)
- Motor: Sealed 5.2 HP (3.8 kW) Series Wound
- Gearing: 3-Stage Planetary
- Gear Ratio: 218:1
- Weather-Sealed Solenoid
- Freespooling Clutch: Ergo, Pull and Turn
- Brake: Mechanical, Automatic load holding
- Wire Rope: 21/64" x 94' (8.3mm x 28m)
- Hook: Heavy Duty / Clevis Pinned / Latched
- Heavy Duty Roller Fairlead with Stainless Steel Rollers
- Remote Control: 12' Rubber Hand-Held
- Dimensions: 20.83" L x 6.3" W x 9.23" H  
(529.0mm L x 160.0mm W x 234.5mm H)
- Drum Diameter: 2.5" (63.5mm)
- Drum Length: 9.0" (228.6mm)
- Mounting Bolt Pattern: 10" x 4.5" (254 mm x 114.3 mm)
- Installed Weight: 90 lbs (41 kg)
- Shipping Weight: 97 lbs (44.0 kg)
- Limited 2 Year Warranty
- UPC: 0 22705 00360 5

## Performance (First layer on drum)

Line Pull lb (kg)	Motor Amps	Line Speed FPM (MPM)
0	80	19.0 (5.7)
9,500 (4,309 kg)	340	4.0 (1.2)



Customer Service, U.S.A. 800 323 2031

**Part Number:** 1511200 12VDC

Application: Vehicle Recovery/Off Road/Utility

## Specifications

- Rated Line Pull: 11,500lbs (5,216 kg)
- Motor: Sealed 6.0 HP (4.48 kW) Series Wound
- Gearing: 3-Stage Planetary
- Gear Ratio: 218:1
- Weather-Sealed Solenoid
- Freespooling Clutch: Ergo, Pull and Turn
- Brake: Mechanical, Automatic load holding
- Wire Rope: 3/8" x 85' (9.5mm x 26m)
- Hook: Heavy Duty / Clevis Pinned / Latched
- Heavy Duty Roller Fairlead with Stainless Steel Rollers
- Remote Control: 12' Rubber Hand-Held
- Dimensions: 20.83" L x 6.3" W x 9.23" H  
(529.0mm L x 160.0mm W x 234.5mm H)
- Drum Diameter: 2.5" (63.5 mm)
- Drum Length: 9.0" (228.6mm)
- Mounting Bolt Pattern: 10" x 4.5" (254mm x 114.3mm)
- Installed Weight: 94 lbs (42 kg)
- Shipping Weight: 101.4 lbs (46 kg)
- Limited 2 Year Warranty
- UPC 0 22705 00361 5

## Performance (First layer on drum)

Line Pull lb (kg)	Motor Amps	Line Speed FPM (MPM)
0	80	19.0 (5.7)
11,500 (5,216 kg)	410	2.0 (0.6)



Customer Service, U.K. 44(0) 1822 614101



## TIGER SHARK 13500

**Part Number: P/N 1513200 12VDC**

**Application:** Enthusiast/Vehicle Recovery/Utility

### Specifications

- Rated Line Pull: 13,500lbs (6,123.5 kg)
- Motor: Sealed 5.3 HP (3.95 kW) Series Wound
- Gearing: 4-Stage Planetary
- Gear Ratio: 518:1
- Weather-Sealed Solenoid
- Freespooling Clutch, Ergo Pull and Turn
- Brake: Mechanical, Automatic load holding
- Wire Rope: 13/32" x 95' (10.3mm x 26m)
- Hook: Heavy Duty/Pinned Clevis / Latch
- Heavy-Duty Roller Fairlead with Stainless Steel Rollers
- Remote Control: 12' Rubber Hand-Held
- Dimensions: 23.68" L x 8.44" W x 11.0" H  
(601.5mm L x 214.5mm W x 279mm H)
- Drum Diameter: 3.5" (89mm)
- Drum Length: 8.7" (220mm)
- Mounting Bolt Pattern: 10" x 4.5" (254mm x 114.3mm)
- Installed Weight: 134 lbs (60.7 kg)
- Shipping Weight: 143 lbs (64.8 kg)
- Limited 2-Year Warranty
- UPC 0 2705 00362 9

### Performance (First layer on drum)

Line Pull lb (kg)	Motor Amps	Line Speed FPM (MPM)
0	120	11.0 (3.4)
13,500 (6,123.5 kg)	370	4 (1.2)



Utility  
& Multi



## TIGER SHARK LARGE ADVANTAGE

**Tiger Shark Large Chassis available in 13,500 lbs, 15,500 lbs and 17,500 lbs. Rigorously designed, these winches are fully capable machines. Get the peace of mind that only a winch designed, engineered and tested at Superwinch's laboratory can provide! Check out these "STANDARD ISSUE" features:**

- Engineered and load tested all the way to stall – it's the only way to know what a winch is fully capable of.
- Ultra-tough 4-stage planetary gear box handles stress and torque on demand.
- Severe-Duty textured finish resists harsh outdoor and off-road abuse.
- 3 stainless steel tie bars to control torsion, remountable for front or foot forward operation (Superwinch exclusive).
- Heavy-duty 4-way fairlead with stainless steel rollers endure weather and wire rope abuse.
- "Lift and Pull" ergo freespool lever stops trail debris from activating your winch during vigorous off-road maneuvers.





**Part Number:** 1515200 12VDC

**Application:** Enthusiast/Vehicle Recovery/Utility

## Specifications

- Rated Line Pull: 15,500 lbs (7,031 kg)
- Motor: Sealed 5.7 HP (4.25 kW) Series Wound
- Gearing: 4-Stage Planetary
- Gear Ratio: 518:1
- Weather-Sealed Solenoid
- Freespooling Clutch Ergo Pull and Turn
- Brake: Mechanical, Automatic Load Folding
- Wire Rope: 29/64" x 92' (11.5mm x 28m)
- Hook: Heavy Duty Clevis Pinned Latch
- Heavy-Duty Roller Fairlead Stainless Steel Rollers
- Remote Control: 12' Rubber Hand-Held
- Dimensions: 23.68" L x 8.44" W x 11.0" H  
(601.5mm L x 214.5mm W x 279mm H)
- Drum Diameter: 3.5" (89mm)
- Drum Length: 8.7" (220 mm)
- Mounting Bolt Pattern: 10" x 4.5" (254 mm x 114.3 mm)
- Installed Weight: 140 lbs (63.5 kg)
- Shipping Weight: 149 lbs (67.5 kg)
- Limited 2-Year Warranty
- UPC 0 22705 00363 6

## Performance (First layer on drum)

Line Pull lb (kg)	Motor Amps	Line Speed FPM (MPM)
0	120	11.0 (3.4)
15,500 (7,031 kg)	440	3.5 (1.0)



**Part Number:** 1517200 12VDC

**Application:** Enthusiast/Vehicle Recovery/Utility

## Specifications

- Rated Line Pull: 17,500 lbs (7,938 kg)
- Motor: Sealed 6.5 HP (4.84 kW) Series Wound
- Gearing: 4-Stage Planetary
- Gear Ratio: 518:1
- Weather-Sealed Solenoid
- Freespooling Clutch: Ergo Pull and Turn
- Brake: Mechanical, Automatic Load Holding
- Wire Rope: 1/2" x 90' (13mm x 27m)
- Hook: Heavy Duty / Clevis Pinned / Latch
- Heavy-Duty Roller Fairlead Stainless Steel Rollers
- Remote Control: 12' Rubber Hand-Held
- Dimensions: 23.68" L x 8.44" W x 11.0" H  
(601.5mm L x 214.5mm W x 279mm H)
- Drum Diameter: 3.5" (89mm)
- Drum Length: 8.7" (224mm)
- Mounting Bolt Pattern: 10" x 4.5" (254 mm x 114.3 mm)
- Installed Weight: 150 lbs (68.0 kg)
- Shipping Weight: 159 lbs (72.12 kg)
- Limited 2-Year Warranty
- UPC 0 22705 00364 3

## Performance (First layer on drum)

Line Pull lb (kg)	Motor Amps	Line Speed FPM (MPM)
0	120	11.0 (3.4)
17,500 (7,938 kg)	460	2.8 (0.85)





# S SERIES ADVANTAGE

## HEAVY DUTY PLANETARY GEAR WINCHES

The S Series from Supewinch® is the most popular performance trailer winch on the market, with good reason. With race proven reliability, S Series winches have full metal gears, powerful motors, integrated sealed switching solenoid, and rugged 30' hand-held remote.



The S Series Advantage-full metal gears deliver power and performance, preferred by the professionals for safe, dependable loading. 30' hand-held rubber-coated switch is included. Instant stop design ensures absolutely no coasting. Lever operated clutch simplifies fast rope payout. Fully weather resistant cover keeps out the elements. S3 Solenoid is submersible, sealed and comes with an exclusive 3-year warranty.

*NEVER USE A WINCH TO SUSPEND A LOAD, NEVER USE A WINCH TO LIFT OR MOVE PEOPLE*



# S 3000



# S 4000

**Part Number:** 1430200 12VDC (1430300 24VDC)

**Application:** Vehicle Recovery/Trailer/Utility

## Specifications

- Rated Line Pull: 3,000 lbs (1,361 kg)
- Motor: 1.3 hp (.96 kW) Permanent Magnet
- Gearing: Planetary Differential
- Gear Ratio: 159:1
- Can Style Solenoid/Circuit Breaker
- Freespooling Clutch - Lever Action
- Brake: Automatic /50%, First Wrap Spring Brake
- Wire Rope 3/16" x 60' (4.8mm x 18.2m)
- Hook: Heavy Duty/ Permanent /Latched
- 4-way Roller Fairlead
- Remote Control: 30' Sealed Hand-Held
- Dimensions: 15.1" L x 8.7" D x 6.0" H  
(383mm L x 221mm D x 152mm H)
- Drum Diameter: 1.625" (41.3mm)
- Drum Length: 3" (76.2mm)
- Mounting Bolt Pattern: 2-hole, 3.69" (94mm) on center
- Installed Weight: 28.2 (12.79 kg) 37.0 (16.78 kg)
- Shipping Weight: 31.2 lbs (14.15 kg) / 40.0 lbs (18.14 kg)
- Limited Lifetime Warranty
- UPC 0 22705 00033 8 / (0 22705 00036 9) 24VDC

## Performance (First layer on drum)

Line Pull lb (kg)	Motor Amps	Line Speed FPM (MPM)
0	15	17.0 (5.1)
3,000 (1,361)	220	4.5 (1.4)

**Part Number:** 1440200 12VDC (1440300 24VDC)

**Application:** Vehicle Recovery/Trailer/Utility

## Specifications

- Rated Line Pull: 4,000 lbs (1,814 kg)
- Motor: 1.8 hp (1.34 kW) Permanent Magnet
- Gearing: Planetary Differential
- Gear Ratio: 159:1
- Sealed Submersible Solenoid/Circuit Breaker
- Freespooling Clutch - Lever Action
- Brake: Automatic /50%, First Wrap Spring Brake
- Wire Rope 7/32" x 60' (5.6mm x 18.2m)
- Hook: Permanent /Latched
- 4-way Roller Fairlead
- Remote Control: 30' Sealed Hand-Held
- Dimensions: 15.1" L x 8.7" D x 6.0" H  
(383mm L x 221mm D x 152mm H)
- Drum Diameter: 1.625" (41.3mm)
- Drum Length: 3" (76.2mm)
- Mounting Bolt Pattern: 2-hole, 3.69" (94mm) on center
- Installed Weight: 30.5 lbs (13.8 kg)
- Shipping Weight: 33.5 lbs (15.1 kg)
- Limited Lifetime Warranty / 3-Year solenoid
- UPC 0 22705 00034 5 / (0 22705 00037 6) 24V DC

## Performance (First layer on drum)

Line Pull lb (kg)	Motor Amps	Line Speed FPM (MPM)
0	30	21.6 (6.5)
4,000 (1,814)	311	4.5 (1.4)



CE



"Whichever trailer you're loading there's a Superwinch designed to deliver the power to meet your needs. I've been using Superwinch products for over 20 years. My job is wheel standing and entertaining crowds of race enthusiasts from all over the world. ---*Danny O'Day*



**Part Number:** 1450200DD 12VDC

**Application:** Vehicle Recovery/Off Road Truck/Suv

**Specifications**

- Rated Line Pull: 6,400 lbs (2,903 kg) rolling weight
- Motor: 1.8 hp (1.34 kW h) Permanent Magnet
- Gearing: Differential Planetary
- Gear Ratio: 159:1
- Sealed Submersible Solenoid / Circuit Breaker
- Freespooling Clutch - Lift Lever Action
- Brake: Automatic /50%, First Wrap Spring Brake
- Synthetic Rope 1/4" x 40' (6.4mm x 12.2m)
- Hook: Heavy Duty / Clevis Pinned / Latched
- 4- Way Roller Fairlead
- Remote Control: 30' Sealed Hand-Held and Wireless
- Dimensions: 15.1" L x 8.7" D x 6.0" H  
(3.83mm L x 221mm D x 152mm H)
- Drum Diameter: Steel, 1.68" (42.67mm)
- Drum Length: 3" (76.2mm)
- Mounting Bolt Pattern: 2-Hole, 3.69" (93.7mm) on center
- Installed Weight: 32 lbs (14.51 kg)
- Shipping Weight: 40 lbs (18.14 kg)
- Limited Lifetime Warranty/3-Year Solenoid
- UPC 0 22705 00304 9

**Performance** (First layer on drum)

Line Pull lb (kg)	Motor Amps	Line Speed FPM (MPM)
0	30	21.6 (6.5)
6,400 lbs (2,903)	110	10.5 (3.2)



(Items subject to change at any time)





# S 4000 SR



# S 5000

**Part Number:** 1440200SR 12VDC

**Application:** Vehicle Recovery/Trailer/Utility

## Specifications

- Rated Line Pull: 6,400 lbs (2,903 kg) rolling weight
- Motor: 1.8 hp (1.34 kW) Permanent Magnet
- Gearing: Planetary Differential
- Gear Ratio: 159:1
- Sealed Submersible Solenoid/ Circuit Breaker
- Freespooling Clutch - Lift Lever Action
- Brake: Automatic /50%, First Wrap Spring Brake
- Synthetic Rope 1/4" x 50' (6.4mm x 15.2m)
- Hook: Heavy Duty / Clevis Pinned / Latched
- 4-Way Roller Fairlead
- Remote Control: 30' Sealed hand-held
- Dimensions: 15.1" L x 8.7" D x 6.0" H  
(3.83mm L x 221mm D x 152mm H)
- Drum Diameter: Steel, 1.68" (42.67mm)
- Drum Length: 3" (76.2mm)
- Mounting Bolt Pattern: 2-hole, 3.69" (94mm) on center
- Installed Weight: 32 lbs (14.51 kg)
- Shipping Weight: 35 lbs (15.87 kg)
- Limited Lifetime Warranty/3-Year Solenoid
- UPC 0 22705 00331 5

## Performance (First layer on drum)

Line Pull lb (kg)	Motor Amps	Line Speed FPM (MPM)
0	30	21.6 (6.5)
6,400 lbs (2,903)	111	10.5 (3.2)



**Part Number:** 1450200 12VDC (1450300 24VDC)

**Application:** Vehicle Recovery/Trailer/Utility

## Specifications

- Rated Line Pull: 5,000 lbs (2,268 kg)
- Motor: 2.1 hp (1.57 kW) Permanent Magnet
- Gearing: Planetary Differential
- Gear Ratio: 159:1
- Sealed Submersible Solenoid/ Circuit Breaker
- Freespooling Clutch - Lift Lever Action
- Brake: Automatic /50%, First Wrap Spring Brake
- Wire Rope 1/4" x 50' (6.4mm x 15.2m)
- Hook: Heavy Duty / Permanent / Latched
- 4- Way Roller Fairlead
- Remote Control: 30' Sealed hand-held
- Dimensions: 15.1" L x 8.7" D x 6.0" H  
(3.83mm L x 221mm D x 152mm H)
- Drum Diameter: Cast, 1.625" (41.27mm)
- Drum Length: 3" (76.2mm)
- Mounting Bolt Pattern: 2-Hole, 3.69" (94mm) on center
- Installed Weight: 38.9 lbs (17.6 kg)
- Shipping Weight: 40 lbs (18.14 kg)
- Limited Lifetime Warranty/3-Year Solenoid
- UPC 0 22705 00035 2 / (0 22705 00038 3) (24VDC)

## Performance (First layer on drum)

Line Pull lb (kg)	Motor Amps	Line Speed FPM (MPM)
0	40	21.6 (6.5)
5,000 lbs (2,268)	350	4.5 (1.4)



**Part Number:** 1110 12VDC

**Application:** Utility / Multipurpose / Industrial

### Specifications

- Rated Line Pull: 1,000 lbs (454 kg)
- Motor: 1.3 hp, (0.96 kW) Permanent Magnet
- Gearing: Planetary Differential
- Gear Ratio: 123:1
- Circuit Breaker Protected
- Freespooling Clutch: N/A
- Brake: Dynamic
- Wire Rope 5/32" x 25' (3.9mm x 7.6m)
- Hook: Permanent/Latched
- Roller Fairlead (optional) : P/N 1560A
- Remote Control: Motor Mounted Switch
- Dimensions: 12" L x 5.38" D x 5.69" H  
(305mm x 137mm x 145mm)
- Drum Diameter: 1.63" (32mm)
- Drum Length: 2.6" (66mm)
- Mounting Bolt Pattern: 2-Hole 3.69" (94mm) on center
- Installed Weight: 15 lbs (7 kgs)
- Shipping Weight: 16.6 lbs (7.5 kgs)
- Limited One Year Warranty
- UPC 0 22705 01101 3

### Performance (First layer on drum)

Line Pull lb (kg)	Motor Amps	Line Speed FPM (MPM)
0	20	20 (6.1)
1,000 (454)	90	12 (3.66)

**Part Number:** 1101 12VDC / 1117 24VDC

**Application:** Utility / Multipurpose / Industrial

### Specifications

- Rated Line Pull: 2,000 lbs (907 kg)
- Motor: 1.8 hp (1.34 kW) Permanent Magnet
- Gearing: Differential Planetary
- Gear Ratio: 123:1
- Circuit Breaker Protected
- Freespooling Clutch: N/A
- Brake: Dynamic
- Wire Rope 3/16" x 25' (1101), 50' (1117)
- Hook: Permanent / Latched
- Roller Fairlead: Optional P/N 1560A
- Remote Control: Motor Mounted Switch
- Dimensions: 15.34" L x 6.13" D x 5.69" H (390mm L x 156mm D x 146mm H)
- Drum Diameter: 1.5" / 1.63" (38.1mm / 41mm)
- Drum Length: 2.6" (66mm)
- Mounting Bolt Pattern: 2-hole 3.69" (94mm) on center
- Installed Weight: 15 lbs (8.16 kg)
- Shipping Weight: 24 lbs (6.8 kg)
- Limited One Year Warranty
- UPC 0 22705 01101 3 (0 22705 01117 4) 24VDC

### Performance (First layer on drum)

Line Pull lb (kg)	Motor Amps	Line Speed FPM (MPM)
0	30	25.5 (7.8)
2,000 (907)	200	7 (2.1)



Utility  
& Multi



CE





**Part Number:** 1201 12VDC / 1208 12VDC /  
1213 24VDC / 1215 24VDC

**Application:** Utility / Multipurpose / Industrial

## Specifications

- Rated Line Pull: 3,000 lbs (1,361 kg)
- Motor: 1.8 hp (1.34 kW) Permanent Magnet
- Gearing: Differential Planetary
- Gear Ratio: 148:1
- Circuit Breaker Protected
- Freespooling Clutch (On P/N 1208 & 1215 Only)
- Brake: Dynamic
- Wire Rope 7/32" x 40' (5.6mm x 12.19m)
- Hook: Permanent / Latched
- Hawse: Standard / Roller Fairlead: Optional P/N 1560A
- Remote Control: Motor Mounted Switch
- Dimensions: 12.81" L x 6.13" D x 5.69" H  
(325mm L x 156mm D x 146mm H)
- Drum Diameter: 1.5" / 1.63" (38.1mm / 41mm)
- Drum Length: 2.6" (66mm)
- Mounting Bolt Pattern: 2-Hole 3.69" (94mm) on Center
- Installed Weight: 19 lbs (8.6 kg) / 21 lbs (9.5 kg)
- Shipping Weight: 22 lbs (9.9 kg) / 24 lbs (10.8 kg)
- Limited One Year Warranty
- UPC 0 22705 01201 0 / 0 22705 01213 3

## Performance (First layer on drum)

Line Pull lb (kg)	Motor Amps	Line Speed FPM (MPM)
0	30	27 (8.2)
3,000 (1,361)	223	4.3 (1.3)



1208, 1215



1213, 1201

Utility  
& Multi



CE

**Part Number:** 1307 12VDC (1316 24VDC)

**Application:** Utility / Multipurpose / Industrial

## Specifications

- Rated Line Pull: 4,000 lbs (1,814 kg)
- Motor: 2.0 hp, (1.5 kW) Permanent Magnet
- Gearing: Planetary Differential
- Gear Ratio: 148:1
- Circuit Breaker Protected
- Freespooling Clutch: Pull & Turn
- Brake: Dynamic
- Wire Rope 7/32" x 50' (5.6mm x 15.2m)
- Hook: Permanent / Latched
- Roller Fairlead (optional) : P/N 1560A
- Remote Control: 15' Sealed Hand Held
- Dimensions: 15.34" L x 8.0" D x 6.06" H,  
(390mm x 203mm x 154mm)
- Drum Diameter: 1.63" (32mm)
- Drum Length: 2.6" (66mm)
- Mounting Bolt Pattern: 2-Hole 3.69" (94mm) on center
- Installed Weight: 15 lbs (7 kg)
- Shipping Weight: 18 lbs (8.16 kg)
- Limited One Year Warranty
- UPC 0 22705 00202 8 / (0 22705 01316 1)

## Performance (First layer on drum)

Line Pull lb (kg)	Motor Amps	Line Speed FPM (MPM)
0	35	33 (9.1)
4,000 (1,814)	290	3.5 (1.1)



**Part Number:** 1320222 12VDC (UK/EU)

**Application:** Utility / Multipurpose / Trailer

## Specifications

- Rated Line Pull: 3,000 lbs (1,361 kg)
- Motor: 1.1 hp (.82 kW) Permanent Magnet
- Gearing: 1-Stage Planetary
- Gear Ratio: 153:1
- Sealed Submersible Solenoid / Circuit Breaker Protected
- Freespooling Clutch - Pull & Turn
- Brake: Automatic / Mechanical and Dynamic
- Wire Rope 5/32" x 60' (3.9mm x 18.2m)
- Hook: Permanent / Latched
- 4-way Roller Fairlead & Pulley Block
- Remote Control: 15' Sealed Hand-Held
- Dimensions: 12.5" L x 3.9" D x 4.1" H,  
(317.5mm L x 100mm D x 104mm H)
- Drum Diameter: 1.25" (31.8mm)
- Drum Length: 2.9" (73.7mm)
- Mounting Bolt Pattern: 2-Hole 3.13" (79.5mm) on Center
- Installed Weight: 16 lbs (7.25 kg)
- Shipping Weight: 28 lbs (12.70 kg)
- Limited Lifetime Warranty / 3-Year Solenoid
- UPC 0 22705 00032 1

## Performance (First layer on drum)

Line Pull lb (kg)	Motor Amps	Line Speed FPM (MPM)
0	15	26.9 (8.2)
3,000 (1,361)	180	5.0 (1.5)



**Part Number:** 1330200 12VDC

**Application:** Utility / Multipurpose / Trailer

## Specifications

- Rated Line Pull: 3,000 lbs (1,361 kg)
- Motor: 1.1 hp (.82 kW) Permanent Magnet
- Gearing: 1-Stage Planetary
- Gear Ratio: 153:1
- Sealed Submersible Solenoid / Circuit Breaker Protected
- Freespooling Clutch - Pull & Turn
- Brake: Automatic / Mechanical and Dynamic
- Wire Rope 3/16" x 50' (4.8mm x 45.2m)
- Hook: Standard Duty Clevis-Pinned
- Roller Fairlead
- Remote Control: 15' Sealed Hand-Held
- Dimensions: 12.5" L x 3.9" D x 4.1" H,  
(317.5mm L x 100mm D x 104mm H)
- Drum Diameter: 1.25" (31.8mm)
- Drum Length: 2.9" (73.7mm)
- Mounting Bolt Pattern: 2-Hole 3.13" (79.5mm) on Center
- Installed Weight: 16 lbs (7.25 kg)
- Shipping Weight: 28 lbs (12.70 kg)
- Limited Lifetime Warranty / 3-Year Solenoid
- UPC 0 22705 00032 1

## Performance (First layer on drum)

Line Pull lb (kg)	Motor Amps	Line Speed FPM (MPM)
0	15	26.9 (8.2)
3,000 (1,361)	180	5.0 (1.5)



Utility  
& Multi



CE



**Part Number:** 1220210 12VDC  
**Application:** Utility / Multipurpose

## Specifications

- Rated Line Pull: 2,000 lbs (907 kg)
- Motor: 1.0 hp (.75 kW) Permanent Magnet
- Gearing: 1-Stage Planetary
- Gear Ratio: 153:1
- Circuit Breaker Protected
- Freespooling Clutch - Pull and Turn
- Brake: N/A
- Wire Rope 5/32" x 49' (3.9mm x 15m)
- Hook: Standard Duty/Permanent/Latched
- Roller Fairlead: optional, P/N 2302001
- Remote Control: 8' Hand Held
- Dimensions: 11.0" L x 4.1" D x 4.1" H  
 (285mm L x 105mm D x 105 mm H)
- Drum Diameter: 1.25" (31.8mm)
- Drum Length: 2.83" (72.0mm)
- Mounting Bolt Pattern: 2 holes, 3.15" (80mm) on center
- Installed Weight: 12.0 lbs (5.4 kg)
- Shipping Weight: 17.4 lbs (7.89 kg)
- Limited One Year Warranty
- UPC 0 22705 00264 6

## Performance (First layer on drum)

Line Pull lb (kg)	Motor Amps	Line Speed FPM (MPM)
0	10	10 (3.0)
2,000 (907)	100	2.5 (0.8)

**Part Number:** 1331200 12VDC  
**Application:** Utility / Multipurpose

## Specifications

- Rated Line Pull: 3,000 lbs (1,361 kg)
- Motor: 1.2 hp (.89 kW) Permanent Magnet
- Gearing: 1-Stage Planetary
- Gear Ratio: 153:1
- Circuit Breaker Protected
- Freespooling Clutch - Pull and Turn
- Brake: Dynamic
- Wire Rope 3/16" x 40' (4.8mm x 12m)
- Hook: Heavy Duty / Clevis Pinned / Latched
- Heavy Duty 4 - Way Roller Fairlead
- Remote Control: 15' Rubber Hand-Held
- Dimensions: 12.0" L x 7.5" D x 7.0" H  
 (304.8mm L x 190.5mm D x 177.8mm L)
- Drum Diameter: 1.25" (31.8mm)
- Drum Length: 2.83" (72.0mm)
- Mounting Bolt Pattern: 2 holes, 3.15" (80mm) on center
- Installed Weight: 19.5 lbs (8.84 kg)
- Shipping Weight: 22.3 lbs (10.11 kg)
- Limited One Year Warranty
- UPC 0 22705 00272 1

## Performance (First layer on drum)

Line Pull lb (kg)	Motor Amps	Line Speed FPM (MPM)
0	5	8.5 (2.58)
3,000 (1,361)	110	2.2 (0.6)



Utility  
& Multi



CE







# TERRA SERIES ADVANTAGE

## High Performance ATV & Side by Side

Designed with the toughest terrains in mind, this line of 2,500, 3,500 and 4,500 lbs rated line pull ATV and Side-by-Side winches feature a rugged all metal 3-stage planetary gear train constructed with over sized gears with unique bearing surfaces lubricated with synthetic grease providing longer life, more torque and strong enough to get users out of virtually anything they get into. Even the severe-duty textured finish resists harsh off-road abuse.



# TERRA SERIES

All three winches come standard with a steel drum specifically designed to withstand the rigor of synthetic rope (a Superwinch Exclusive) and are available with either galvanized wire rope with a 4-way roller fairlead or Blue AmSteel Dyneema® SK-75 synthetic rope (yellow in color and rated at 7,700 lbs – the competition's synthetic rope is only rated at 4,000 lbs at best) and attached to a heavy-duty clevis pinned latched hook. The synthetic rope models include a blue anodized aluminium hawse engraved with the Superwinch logo.

The heavy duty permanent magnet motor includes larger diameter wire within the winding (nearly twice as thick as the competition) and sealed bearings at both ends of the motor (the competition only uses one bearing and a cheap bushing on the opposite end). The highest horsepower/torque and lowest amperage draw in the industry, pulls more weight longer and faster in deep mud and water, and puts the least amount of drain on the battery.

This is the industry's first truly sealed ATV winch assembly. All seals on the entire winch from the outermost end of the motor to the ergonomic free spool control knob all meets the IP67 rating. Even the handlebar mounted rocker switch, the 10' hand-held remote and the solenoid are sealed and meet this same tough standard which ensures to keep out water, mud, snow and dust.



Sealed hand held remote



Sealed handle bar switch

Rugged all steel planetary gear set, strong enough for the largest loads, standard in all TERRA winches. Gears are twice as wide as the competition; Superwinch provides more torque and longer life. Superwinch gear (left), competitor's gear (right)



Steel Drum designed for synthetic rope, Superwinch steel drum (right) Competitor's cast drum, cracked (left)



Easy to engage and disengage, ergonomic freespool, standard on all TERRA winches



NEVER USE A WINCH TO SUSPEND A LOAD, NEVER USE A WINCH TO LIFT OR MOVE PEOPLE



**Part Number:** 1125220 12VDC

**Application:** ATV / UTV

## Specifications

- Rated Line Pull: 2,500 lbs (1,134 kg)
- Motor: Sealed 1.3 hp, (.96 kW) Permanent Magnet
- Gearing: 3-Stage Planetary
- Gear Ratio: 140:1
- Sealed Solenoid with Circuit Breaker
- Freespooling Clutch: Ergonomic Control
- Brake: Automatic /100% Load Holding
- Wire Rope 3/16" x 50' (4.8mm x 15.2m)
- Hook: Heavy Duty/Clevis Pinned/Latched
- Heavy Duty 4-way Roller Fairlead
- Remote Control: 10' Sealed Hand-Held & Handle Bar Switch
- Dimensions: 13.2" L x 4.5" D x 4.8" H  
(335mm L x 114mm D x 122mm H)
- Drum Diameter: Steel 2.0" (50.8mm)
- Drum Length: 3.2" (81.3mm)
- Mounting Bolt Pattern: 3" x 4.87" (76mm x 124mm)
- Installed Weight: 18 lbs. (8.2 kg)
- Shipping Weight: 29.5 lbs (13.3 kg)
- Limited Lifetime Warranty
- UPC 0 22705 00342 1

## Performance (First layer on drum)

Line Pull lb (kg)	Motor Amps	Line Speed FPM (MPM)
0	25	26.0 (7.9)
2,500 (1,134)	162	10.5 (3.2)

**Part Number:** 1125230 12VDC

**Application:** ATV / UTV

## Specifications

- Rated Line Pull: 2,500 lbs (1,134 kg)
- Motor: Sealed 1.3 hp, (.96 kW) Permanent Magnet
- Gearing: 3-Stage Planetary
- Gear Ratio: 140:1
- Sealed Solenoid with Circuit Breaker
- Freespooling Clutch: Ergonomic Control
- Brake: Automatic /100% Load Holding
- Synthetic Rope 3/16" x 50' (4.8mm x 15.2m)
- Hook: Heavy Duty/Clevis Pinned/Latched
- Blue Anodized Aluminium Hawse
- Remote Control: 10' Sealed Hand-Held & Handle Bar Switch
- Dimensions: 13.2" L x 4.5" D x 4.8" H  
(335mm L x 114mm D x 122mm H)
- Drum Diameter: 2.0" (50.8mm)
- Drum Length: 3.2" (81.3mm)
- Mounting Bolt Pattern: 3" x 4.87" (76mm x 124mm)
- Installed Weight: 15 lbs (6.8 kg.)
- Shipping Weight: 23.7 lbs (10.7 kg)
- Limited Lifetime Warranty
- UPC 0 22705 00343 8

## Performance (First layer on drum)

Line Pull lb (kg)	Motor Amps	Line Speed FPM (MPM)
0	25	26.0 (7.9)
2,500 (1,134)	162	10.5 (3.2)



**Part Number:** 1135220, 12VDC

**Application:** ATV/UTV

## Specifications

- Rated Line Pull: 3,500 lbs (1,588 kg)
- Motor: Sealed 1.6 hp (1.2 kW) Permanent Magnet
- Gearing: 3-Stage Planetary
- Gear Ratio: 140:1
- Sealed Solenoid with Circuit Breaker
- Freespooling Clutch: Ergonomic Control
- Brake: Automatic/100% Load Holding
- Wire Rope 13/64" x 50' (5.2mm x 15.2m)
- Hook: Heavy Duty/Clevis Pinned/Latched
- Heavy Duty 4-way Roller Fairlead
- Remote Control: 10' Sealed Hand-held & Handle Bar Switch
- Dimensions: 13.4" L x 4.5" D x 4.8" H  
(340mm L x 114mm D x 122mm H)
- Drum Diameter: 2.0" (50.8mm)
- Drum Length: 3.2" (81.3mm)
- Mounting Bolt Pattern: 3.0" x 4.87" (76mm x 124mm)
- Installed Weight: 20 lbs (9.1 kg)
- Shipping Weight: 30.9 lbs (14.0 kg)
- Limited Lifetime Warranty
- UPC 0 22705 00344 5



## Performance (First layer on drum)

Line Pull lb (kg)	Motor Amps	Line Speed FPM (MPM)
0	19	24 (7.3)
3,500 (1,588)	190	10.2 (3.1)



CE



**Part Number:** 1135230, 12VDC

**Application:** ATV/UTV

## Specifications

- Rated Line Pull: 3,500 lbs (1,588 kg)
- Motor: Sealed 1.6 hp (1.2 kW) Permanent Magnet
- Gearing: 3-Stage Planetary
- Gear Ratio: 140:1
- Sealed Solenoid with Circuit Breaker
- Freespooling Clutch: Ergonomic Control
- Brake: Automatic/100% Load Holding
- Synthetic Rope 3/16" x 50' (4.8mm x 15.2m)
- Hook: Heavy Duty / Clevis Pinned / Latched
- Blue Anodized Aluminum Hawse
- Remote Control: 10' Sealed Hand-held & Handle Bar Switch
- Dimensions: 13.4" L x 4.5" D x 4.8" H,  
(340mm L x 114mm D x 122mm H)
- Drum Diameter: Steel 2.0" (50.8mm)
- Drum Length: 3.2" (81.3mm)
- Mounting Bolt Pattern: 3.0" x 4.87" (76mm x 124mm)
- Installed Weight: 17 lbs (7.7 kg)
- Shipping Weight: 25.2 lbs (11.4 kg)
- Limited Lifetime Warranty
- UPC 0 22705 00345 2

## Performance (First layer on drum)

Line Pull lb (kg)	Motor Amps	Line Speed FPM (MPM)
0	19	24 (7.3)
3,500 (1,588)	190	10.2 (3.1)





**Part Number:** 1145220, 12VDC

**Application:** UTV/Side-By-Side

## Specifications

- Rated Line Pull: 4,500 lbs (2,041 kg)
- Motor: Sealed 1.6 hp (1.2kW) Permanent Magnet
- Gearing: 3-Stage Planetary
- Gear Ratio: 191:1
- Sealed Solenoid with Circuit Breaker
- Freespooling Clutch: Ergonomic Control
- Brake: Automatic/100% Load Holding
- Wire Rope 1/4" x 55' (6.5mm x 16.8m)
- Hook: Heavy Duty / Clevis Pinned / Latched
- Heavy Duty 4-way Roller Fairlead
- Remote Control: 10' Sealed hand-held & Handle Bar Switch
- Dimensions: 15.1" L x 4.5"D x 4.8" H  
(384mm L x 114mm D x 122mm H)
- Drum Diameter: 2.0" (50.2mm)
- Drum Length: 4.9" (124.5mm)
- Mounting Bolt Pattern: 3.0" x 6.66" (76mm x 169mm)
- Installed Weight: 22.0 lbs (10.0 kg)
- Shipping Weight: 34.0 lbs (15.4 kg)
- Limited Lifetime Warranty
- UPC 0 22705 00346 9

## Performance (First layer on drum)

Line Pull lb (kg)	Motor Amps	Line Speed FPM (MPM)
0	21	15.0 (4.6)
4,500 (2,041)	178	5.5 (1.7)

**Part Number:** 1145230, 12VDC

**Application:** UTV/Side-By-Side

## Specifications

- Rated Line Pull: 4,500 lbs (2,041 kg)
- Motor: Sealed 1.6 hp (1.2kW) Permanent Magnet
- Gearing: 3-Stage Planetary
- Gear Ratio: 191:1
- Sealed Solenoid with Circuit Breaker
- Freespooling Clutch: Ergonomic Control
- Brake: Automatic/100% Load Holding
- Synthetic Rope 1/4" x 50' (6.5mm x 15.2m)
- Hook: Heavy Duty / Clevis Pinned / Latched
- Blue Anodized Aluminium Hawse
- Remote Control: 10' Sealed hand-held & Handle Bar Switch
- Dimensions: 15.1" L x 4.5"D x 4.8" H  
(384mm L x 114mm D x 122mm H)
- Drum Diameter: 2.0" (50.2mm)
- Drum Length: 4.9" (124.5mm)
- Mounting Bolt Pattern: 3.0" x 6.66" (76mm x 169mm)
- Installed Weight: 19.0 lbs (8.6 kg)
- Shipping Weight: 27.9 lbs (12.7 kg)
- Limited Lifetime Warranty
- UPC 0 22705 00347 6

## Performance (First layer on drum)

Line Pull lb (kg)	Motor Amps	Line Speed FPM (MPM)
0	21	15.0 (4.6)
4,500 (2,041)	178	5.5 (1.7)



**Part Number:** 1120210 12VDC

**Application:** ATV

## Specifications

- Rated Line Pull: 2,000 lbs (907 kg)
- Motor: 1.0 hp (.75 kW) Permanent Magnet
- Gearing: 1-Stage Planetary
- Gear Ratio: 153:1
- Dual Relays / Circuit Breaker Protected
- Freespooling Clutch - Pull and Turn
- Brake: Dynamic
- Wire Rope: 5/32" x 49' (3.9mm x 14.9m)
- Hook: Standard Duty/Permanent/Latched
- 4-way Roller Fairlead, Pulley Block & D Shackle
- Remote Control: Handle Bar Mounted Switch
- Dimensions: 11.0" L x 4.1" D x 4.1" H  
(285mm L x 105mm D x 105mm H)
- Drum Diameter: 1.25" (31.8mm)
- Drum Length: 2.83" (72.0mm)
- Mounting Bolt Pattern: 2 Hole, 3.15" (80mm) on center
- Installed Weight: 14.20 lbs (6.44 kg)
- Shipping Weight: 18.75 lbs (8.50 kg)
- Limited One Year Warranty
- UPC: 0 22705 00265 3

## Performance (First layer on drum)

Line Pull lb (kg)	Motor Amps	Line Speed FPM (MPM)
0	10	10 (3.0)
2,000 (907)	100	2.5 (0.8)



**Part Number:** 1130220 12VDC

**Application:** ATV/UTV

## Specifications

- Rated Line Pull: 3,000 lbs (1,361 kg)
- Motor: Sealed 1.2 hp (.89 kW) Permanent Magnet
- Gearing: 3-Stage Planetary
- Gear Ratio: 136:1
- Solenoid / Circuit Breaker Protected
- Freespooling Clutch: Ergonomic Control
- Brake: Automatic/100% Load Holding
- Wire Rope 3/16" x 50' (4.8mm x 15m)
- Hook: Heavy Duty/Clevis Pinned/Latched
- Heavy duty 4-way Roller Fairlead
- Remote Control: 12' Hand-Held
- Dimensions: 13.2" L x 4.25" D x 4.25" H  
(335mm L x 108mm D x 108mm H)
- Drum Diameter: 2.0" (50.8mm)
- Drum Length: 2.9" (73.66mm)
- Mounting Bolt Pattern: 3.0" x 4.87" (76mm x 124mm)
- Installed Weight: 20 lbs (9.0 kg)
- Shipping Weight: 27 lbs (12.24 kg)
- Limited 2 year Warranty
- UPC 0 22705 00316 2

## Performance (First layer on drum)

Line Pull lb (kg)	Motor Amps	Line Speed FPM (MPM)
0	15	23 (7.0)
3,000 (1,361)	180	4.0 (1.2)





**Part Number:** 1120149 12VDC

**Application:** ATV/UTV/Snowmobile/Utility

## Specifications

- Rated Line Pull: 2,000 lbs (907 kg)
- Motor: 1.0 hp (.75 kW) Permanent Magnet
- Gearing: 1-Stage Planetary
- Gear Ratio: 153:1
- Circuit Breaker Protected
- Freespooling Clutch - Pull & Turn
- Brake: N/A
- Wire Rope 5/32" x 49' (3.9mm x 14.9m)
- Hook: 1/4" Heavy Duty/Clevis Pinned/Latched
- Teflon® Winch Rope Guide
- Remote Control: 8' Hand-Held
- Versatile, Compact & Light Weight
- Drum Diameter: 1.25" (31.8mm)
- Drum Length: 2.83" (72.0mm)
- Completely Portable No Mount Required
- Installed Weight: 16.15 lbs (7.32 kg)
- Shipping Weight: 24 lbs (10.88 kg)
- Limited One Year Warranty
- UPC 0 22705 00305 6
- Heavy Duty 4' and 6' strap
- Bow Shackle
- Storage Bag



**Part Number:** 1125149 12VDC

**Application:** ATV/UTV/Snowmobile/Utility

## Specifications

- Rated Line Pull: 2,500 lbs (1,134 kg)
- Motor: 1.1 hp (.82 kW) Permanent Magnet
- Gearing: 1-Stage Planetary
- Gear Ratio: 153:1
- Circuit Breaker Protected
- Freespooling Clutch - Ergonomic Control
- Brake: N/A
- Wire Rope 3/16" x 40' (4.8mm x 12.0m)
- Hook: 1/4" Heavy Duty/Clevis Pinned/Latched
- Teflon® Winch Rope Guide
- Remote Control: 8' Hand-Held
- Versatile, Compact & Light Weight
- Drum Diameter: 1.61" (41mm)
- Drum Length: 2.9" (74mm)
- Completely Portable no Mount Required
- Installed Weight: 18.15 lbs (8.23 kg)
- Shipping Weight: 26.9 lbs (12.2 kg)
- Limited One Year Warranty
- UPC 0 22705 00315 5
- Heavy Duty 6' strap (two)
- Bow Shackle
- Storage Bag and Heavy Duty Gloves





## CRANE SERIES ADVANTAGE COMMERCIAL PLANETARY WINCHES

Earning the 5:1 Safety Factor rating, our C1000 is the right winch to safely lift and move materials. Rated to 1,000 pounds (454 kg.) it's steel spring tension plate, power, "in and out" and full-load mechanical brake ensure secure, easy and smooth operation. 5:1 Safety Factor ensures operator safety while lifting and moving loads. Differential planetary gear design delivers power, and durability. 15' switch on a rubber cord is included P/N 03002 Sturdy 1.8 hp, 12VDC and 24VDC motor includes weather resistant cover (except P/N 03001).

Roller Fairlead • Full metal, differential planetary gear-train • Wire rope tensioning plate • Full load mechanical brake • Twin wire rope set screws • Unit may be mounted in a horizontal or vertical position, (unit must be mounted so that wire rope feeds through the hawse or roller fairlead on the front of the winch without rubbing on the housing or base).

Never use a winch to lift or move people. Note; crane winches do not include wire rope





# C1000 CRANE WINCHES



**Part Number:** 03002 12VDC / 03010 24VDC

**Application:** Utility/Multipurpose/Material Handling

## Specifications

- Rated Line Pull: 1,000 lbs (454 kg)
- Motor: 1.3 hp, (1.17 kW) Series Wound
- Gearing: 1-Stage Planetary
- Gear Ratio: 159:1
- Circuit Breaker Protected
- Freespooling Clutch - N/A
- Brake: Automatic Mechanical and Dynamic
- Wire Rope: Optional P/N 1577A
- Hook: N/A
- Heavy Duty 4-way Roller Fairlead
- Remote Control: 15' Sealed hand-held
- Dimensions: 15.1" L x 8.7" W x 6.0" H  
(382mm L x 224mm D x 152mm H)
- Drum Diameter: 1.625" (41.3mm)
- Drum Length: 3.0" (76.2mm)
- Mounting Bolt Pattern: 2 Hole, 3.69" (93.7mm) on Center
- Installed Weight: 26.8 lbs (12.15 kg)
- Shipping Weight: 29.8 lbs (13.51 kg)
- Limited One Year Warranty
- UPC: 0 22705 30020 9

## Performance (First layer on drum)

Line Pull lb (kg)	Motor Amps	Line Speed FPM (MPM)
0	30	19.5 (5.9)
1,000 (454)	80	14.7 (4.5)



03001, 12VDC with Roller Fairlead

03002, 12VDC with Roller Fairlead and 15' Remote

03010, 24VDC with Roller Fairlead and 15' Remote

NOTE: The C1000 winch has a 5:1 safety factor



03002 / 03010

Utility  
& Multi



CE

**Part Number:** 03001 12VDC (no motor cover)

**Application:** Utility/Multipurpose/Material Handling

## Specifications

- Rated Line Pull: 1,000 lbs (454 kg)
- Motor: 1.3 hp, (1.17 kW) Series Wound
- Gearing: 1-Stage Planetary
- Gear Ratio: 159:1
- Circuit Breaker Protected
- Freespooling Clutch - N/A
- Brake: Automatic Mechanical and Dynamic
- Wire Rope: Optional P/N 1577A
- Hook: N/A
- Heavy duty 4-way Roller Fairlead
- Remote Control: N/A
- Dimensions: 13.6" L x 5.9" D x 6.0" H  
(346mm L x 149mm W x 152mm H)
- Drum Diameter: 1.625" (41.3mm)
- Drum Length: 3.0" (76.2mm)
- Mounting Bolt Pattern: 2 Hole, 3.69" (93.7mm) on Center
- Installed Weight: 29.0 lbs (13.15 kg)
- Shipping Weight: 32.0 lbs (14.51 kg)
- Limited One Year Warranty
- UPC: 0 22705 0018 5

## Performance (First layer on drum)

Line Pull lb (kg)	Motor Amps	Line Speed FPM (MPM)
0	30	19.5 (5.9)
1,000 (454)	80	14.7 (4.5)



03001



**Part Number:** 01002 115VAC 50/60 Hz (01001 115VAC 50/60 Hz FS/RF)

**Application:** Utility/Multipurpose/Material Handling

## Specifications

- Rated Line Pull: 1,000 lbs (454 kg)
- Motor: 0.6 hp (.45 kW)
- Gearing: 1-Stage Planetary
- Gear Ratio: 159:1
- Circuit Breaker
- Freespooling Clutch: Only on model #01001
- Brake: Mechanical/Dynamic
- Wire Rope 3/16" x 50' (4.8mm x 15.2m)
- Hook: Standard Duty/Permanent/Latched
- Roller Fairlead, (01001)/Hawse, (01002)
- Remote Control: 6' Hand-held Pendant
- Dimensions: 15.25" L x 5.9" D x 6" H (387mm L x 150mm D x 152mm H)
- Drum Diameter: 1.625" (41.3mm)
- Drum Length: 3" (76.2mm)
- Mounting Bolt Pattern: 2 Hole, 3.69" (94mm) on Center
- Installed Weight: 25.4 lbs (11.5 kg) / 27.6 lbs (12.5 kg)
- Shipping Weight: 28.4 lbs (12.8 kg) / 30.6 lbs (13.8 kg)
- Limited Lifetime Warranty
- UPC 0 22705 10010 6 / 0 22705 10020 5

## Performance (First layer on drum)

Line Pull lb (kg)	Motor Amps	Line Speed FPM (MPM)
0	4.3	13.8 (4.2)
1,000 (454)	10	9.2 (2.8)



P/N: 01001, 115VAC 50/60 Hz with freespooling and roller fairlead

P/N: 01002, 115VAC 50/60 Hz with hawse

**Note:** This winch has a 5:1 Safety Factor



Electrical Safety Only

**Part Number:** 1401 115VAC 50/60 hz

**Application:** Utility/Multipurpose/Material Handling

## Specifications

- Rated Line Pull: 1,000 lbs (454 kg)
- Motor: .6 hp (.45 kW)
- Gearing: 1-Stage Planetary
- Gear Ratio: 123:1
- Circuit Breaker - Re-setable Push Button
- Freespooling Clutch - N/A
- Brake: Dynamic
- Wire Rope 5/32" x 45' (3.9mm x 13.7m)
- Hook: Permanent/Latched
- Standard Duty Roller Fairlead : optional P/N 1560A
- Remote Control: 6' Hand-held Pendant
- Dimensions: 13.38" L x 5.38" D x 5.69" H, (340mm L x 137mm D x 148mm H)
- Drum Diameter: 1.25" (31.8mm)
- Drum Length: 2.6" (66mm)
- Mounting Bolt Pattern: 2 Hole, 3.69" (94mm on center)
- Installed Weight: 18 lbs (8 kg)
- Shipping Weight: 21.0 lbs (9.5 kg)
- Limited One Year Warranty
- UPC 0 22705 01401 4

## Performance (First layer on drum)

Line Pull lb (kg)	Motor Amps	Line Speed FPM (MPM)
0	3	23.0 (7.0)
1,000 (454)	10	13.0 (4.0)

Utility  
& Multi



NEVER USE A WINCH TO SUSPEND A LOAD, NEVER USE A WINCH TO LIFT OR MOVE PEOPLE





# AC 1500



# AC 2000 AC 3000

**Part Number:** 1715000 115VAC 50/60 hz  
(excludes UK/EU Market)

**Application:** Utility/Multipurpose/Material Handling  
**Specifications**

- Rated Line Pull: 1,500 lbs (680 kg)
- Motor: .6 hp (.45 kW)
- Gearing: 1- Stage Planetary
- Gear Ratio: 153:1
- Circuit Breaker - Resetable Push Button
- Freespooling Clutch - Pull & Turn
- Brake: Automatic/Mechanical & Dynamic
- Wire Rope 3/16" x 35' (4.8mm x 10.6m)
- Hook: Permanent Latched
- Roller Fairlead : optional P/N 1560C
- Remote Control: 6' Hand-held Pendant
- Dimensions: 13.875" L x 4.1" H, 3.9 D  
(340mm L x 148mm H, 99mm D)
- Drum Diameter: 1.25" (31.8mm)
- Drum Length: 2.9" (73.8mm)
- Mounting Bolt Pattern: 2 Hole, 3.13" (79.5mm on center)
- Installed Weight: 18 lbs (8 kg)
- Shipping Weight: 22 lbs (9.9 kg)
- Limited One Year Limited Warranty
- UPC: 0 22705 00214 1

**PERFORMANCE** (First layer on drum)

Line Pull lb (kg)	Motor Amps	Line Speed FPM (MPM)
0	1.2	15.5 (4.7)
1,500 (680)	10	7.2 (2.2)



Electrical Safety Only

Utility  
& Multi

**Part Number:** 1723 115VAC 50/60 Hz, (AC 2000)  
1730000 115VAC 115VAC 50/60 Hz (AC 3000)

(Excludes UK/EU Markets)

**Application:** Utility/Multipurpose/Material Handling

**Specifications** Rated Line Pull: 2,000 lbs (907 kg), (AC 2000)  
3,000 lbs (1361 kg), (AC 3000)

- Motor: AC 2000, .75 hp, AC 3000 1.0 hp 3,450 R.P.M.
- Gearing: 1-Stage Planetary
- Gear Ratio: 253:1
- Duty Cycle : 20 minutes "on time" at full load
- Freespooling Clutch - 1/4 Turn Lever
- Brake: 100% Automatic in the Drum
- Wire Rope 5/16" x 100' (7.9mm x 30.5m)
- Hook: Heavy Duty/Clevis Pinned/Latched
- Roller Fairlead; N/A
- Remote Control: Drum Switch
- Dimensions: 25.25" L X 8.6" D x 9.2" H  
(641.4mm L x 218mm D x 234mm H)
- Drum Diameter: 2.5" (64mm)
- Drum Length: 7.0" (177.9mm)
- Mounting Bolt Pattern: 4 - Hole 4"x 4.5" (101.6mm x 114.3mm)
- Installed Weight: 76 lbs (34.47 kg), (AC 2000)  
78 lbs (35.38 kg), (AC 3000)
- Shipping Weight: 83 lbs (37.64 kg), (AC 2000)  
85 lbs (38.55 kg), (AC 3000)
- Limited Lifetime Warranty
- UPC 0 22705 01723 7, (AC 2000)
- UPC 0 22705 00215 8, (AC 3000)

**PERFORMANCE** (First layer on drum)

Line Pull lb (kg)	Motor Amps	Line Speed FPM (MM)
0	6.6	10.5 (3.2), (AC 2000)
2,000 (907)	11.5	10.0 (3.0), (AC 2000)
0	7.5	10.5 (3.2), (AC 3000)
3,000 (1,361)	16.5	10.3 (3.1), (AC 3000)



Note: AC2000 winch has a 5:1 Safety Factor

NEVER USE A WINCH TO SUSPEND A LOAD, NEVER USE A WINCH TO LIFT OR MOVE PEOPLE



Customer Service, U.S.A. 800 323 2031


Customer Service, U.K. 44(0) 1822 614101




# POWER DRIVES ADVANTAGE

## COMMERCIAL DUTY WORM GEAR DRIVES

Superwinch Power Drives supply reliable power anywhere automation can provide a more efficient method of executing tasks. Safely automating the movement of many types of home, commercial, and industrial equipment, our Power Drives are lightweight and self-contained and ready to plug in. All Superwinch units carry both cross pin hole and keyway mating with rotary or linear applications. From backyards to barns, stadiums to shipyards, Superwinch power is there.

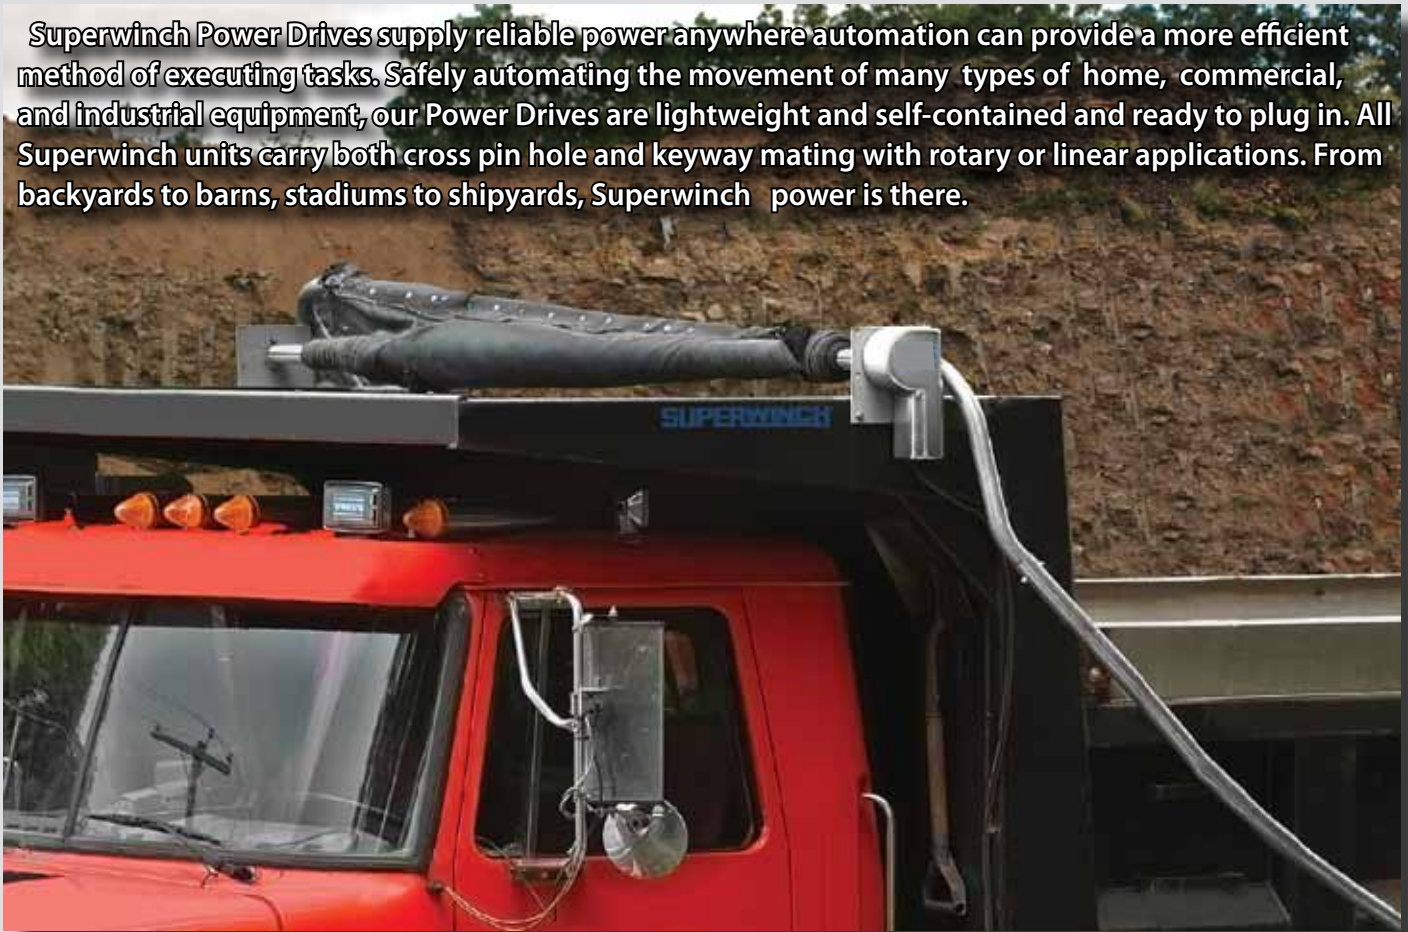

- Oversized ball bearings
- Substantial worm shaft for longer life
- Long life bronze alloy worm wheel
- Keyway shaft for positive engagement
- Aluminium die cast housing and cover, weather sealed

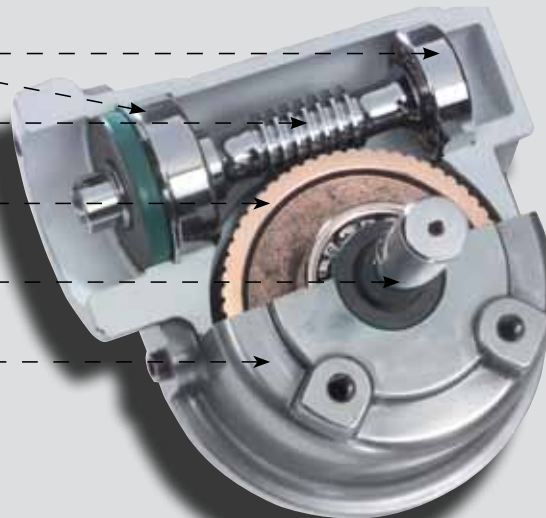

### Superwinch Power Drive Advantage...

- Superwinch power drives are lightweight and self-contained.
- Over 2 million are already on the job whenever automation can provide safer, more efficient operation.
- DC power source, single output, and several gear ratios.
- Motors include four magnet shoes for greater efficiency and longer runs.

*NEVER USE A WINCH TO SUSPEND A LOAD, NEVER USE A WINCH TO LIFT OR MOVE PEOPLE*



Superwinch Power Drives supply reliable power anywhere automation can provide a safer, more efficient method of executing tasks.

## 60:1 Gear Ratio Single Output, 12VDC

P/N	DESCRIPTION
716527	POWER DRIVE, Single Output Shaft, 60:1, 12V DC, Torque: 750 (in.lb) 1.3 h.p. (.97 kw)
716627	POWER DRIVE, Single Output Shaft, 60:1, 12V DC, Torque: 1040 (in.lb) 1.8hp (1.34 kw)
716727	POWER DRIVE, Single Output Shaft, 60:1, 12V DC, Torque: 1200 (in.lb) 2.1hp (1.57 kw)

## 90:1 Gear Ratio Single Output, 12 and 24VDC

P/N	DESCRIPTION
719527	POWER DRIVE, Single Output Shaft, 90:1, 12V DC Torque: 790( in.lb) 1.6 hp (1.2 kw)
719627	POWER DRIVE, Single Output Shaft, 90:1, 12V DC Torque: 1125 (in.lb) 1.6 hp (1.2 kw)
719537	POWER DRIVE, Single Output Shaft, 90:1, 24V DC Torque: 790( in.lb) 1.6 hp (1.2 kw)
719637	POWER DRIVE, Single Output Shaft, 90:1, 24V DC Torque: 1125 (in.lb) 1.8 hp (1.2 kw)
719632	POWER DRIVE, Single Output Shaft, 90:1, 24V DC Torque: 1125 (in.lb) 1.8 hp (1.2 kw)
719630	POWER DRIVE, Single Output Shaft, 90:1, 24V DC Torque: 1125 (in.lb) 1.8 hp (1.57 kw)





## SEPSON SERIES ADVANTAGE



**Taking serious winches to new heights, Superwinch has partnered with Sepson, manufacturer of remarkable military-grade winches. Designed and manufactured in Vasbro, Sweden, Sepson winches offer extreme reliability under all conditions, from tropical heat to arctic cold. If serious winching is your specialty, Sepson is your winch.**

- Easy freespool even at 100,000 lbs (450 kN) capacity
- Pneumatic, hydraulic or manual shift options
- Integrated spooling device increases rope life while speeding up winching operations
- Optional CPT (Constant Pull Technology) provides identical capacity – no matter which layer
- Drag brake prevents rope bird nesting



Made in Sweden



NEVER USE A WINCH TO SUSPEND A LOAD, NEVER USE A WINCH TO LIFT OR MOVE PEOPLE



**Part Number:** H400

**Application:** Military/ Heavy Recovery

## Specifications

- Rated Line Pull: 100,000 lbs (450 kN)
- Motor: High torque
- Gearing: 3-Stage Planetary
- Gear Ratio: 50:1
- Maximum Oil Pressure: 3,000 psi (200 BAR)
- Maximum Oil Flow: 18 gpm (70 l/min)
- Freespooling Clutch: Hydraulic, pneumatic, manual
- Brake: Automatic/100% Load Holding (outside of drum)
- Automatic Spooling Device: optional
- Recommended Rope 1" x 262' (28mm x 80m)
- Drum Diameter: 12.6" (320mm)
- Drum Length: 12" (300mm)
- Mounting Bolt Pattern: Foot Mount
- Installed Weight: 1,276 lbs (580 Kg)
- Rope Weight: 675 lbs (307 Kg)
- Limited Two Year Warranty

## PERFORMANCE (First layer on drum)

### Line Speed Low auto 2 speed: FPM (MPM)

Bottom rope layer	8.2	(2.5)
Top rope layer	13	(4.0)

### Line Speed High auto 2 speed: FPM (MPM)

Bottom rope layer	20	(6.0)
Top rope layer	30	(9.0)



**Part Number:** H120

**Application:** Military/ Heavy Recovery

## Specifications

- Rated Line Pull: 27,000 lbs (120 kN)
- Motor: High torque
- Gearing: Planetary plus Spur Gear
- Gear Ratio: 31.3:1
- Maximum Oil Pressure: 2,610 psi (180 BAR)
- Maximum Oil Flow: 15 gpm (60 l/min)
- Freespooling Clutch: Hydraulic, pneumatic, manual
- Brake: Automatic/100% Load Holding (outside of drum)
- Automatic Spooling Device: N/A
- Recommended Rope ¾" x 196' (19mm x 60m)
- Drum Diameter: 8.8" (224mm)
- Drum Length: Various
- Mounting Bolt Pattern: Various
- Installed Weight: 462 lbs (210 Kg)
- Rope Weight: 147 lbs (67 Kg)
- Limited Two Year Warranty

## PERFORMANCE (First layer on drum)

Line Speed:	FPM (MPM)
Bottom rope layer	20 (6.0)
Top rope layer	31 (9.5)





# HYDRAULIC SERIES ADVANTAGE

## SEVERE DUTY WORM and PLANETARY



**For tough winching applications, no product performs better than Superwinch hydraulic winches.**

- The Superwinch line of hydraulic winches provides you with a continuous duty solution to your winching requirements.
- Designed with the toughest commercial/industrial applications in mind.
- Available in a full range of planetary and worm gear drives with capacities from 8,000 to 30,000 pounds.
- Many of our hydraulic winches are rated in accordance to SAE J 706 standards and are CE certified.
- Engineered to ensure total reliability.
- Most models are available with manual or pneumatic free spool, load holding brakes, and LCV to give you precise control of your load.

*NEVER USE A WINCH TO SUSPEND A LOAD, NEVER USE A WINCH TO LIFT OR MOVE PEOPLE*





**Part Number:** 5050A

**Application:** Vehicle Recovery/Industrial/Marine/Military

### Specifications

- Rated Line Pull: 8,000 lbs (3,630 kg)
- Motor: High torque
- Gearing: 2-Stage Planetary Differential
- Gear Ratio: 16:1
- Maximum Oil Pressure: 1,800 psi (124.13 BAR) 126.58 kg/cm<sup>2</sup>
- Maximum Oil Flow: 15 gpm (57 l/min)
- Freespooling Clutch: Manual Release Lever  
Pneumatic P/N 5603
- **Short Drum:** 23" L x 8.25" D x 9.0" H  
(584.2mm L x 209.5mm D x 228.6mm H)
- Recommended Wire Rope: 3/8" (9.5mm) x 75' (23m)
- **Long Drum:** 25.5" L x 8.25" D x 9.0" H  
(647.7mm L x 209.5mm D x 228.6mm H)
- Recommended Wire Rope: 3/8" (9.5mm) x 100' (30m) long drum
- Drum Diameter: 3.5" (90mm)
- Drum Length: **Short Drum** 7.5" (190mm)
- Drum Length: **Long Drum** 10" (254mm)
- Roller Fairlead: Optional P/N 5600 (short drum) /  
5610A (long drum)
- Mounting Bolt Pattern: Side, Foot, Angle, Flatbed, or Low Mount
- Installed Weight: 84 lbs (38 kg) without wire rope
- Shipping Weight: 92 lbs (41.73 kg) without wire rope
- Limited One Year Warranty
- UPC: 0 22705 50501 7 / 0 22705 50601 4

### Performance (First layer on drum)

Line Speed FPM	MPM
40	(13.8)



**Part Number:** 5170A (Not Available in the UK/EU)

**Application:** Vehicle Recovery/Industrial/Marine/Military

### Specifications

- Rated Line Pull: 10,000 lbs (4,540 kg)
- Motor: High torque
- Gearing: 2-Stage Planetary Differential
- Gear Ratio: 16:1
- Maximum Oil Pressure: 1,700 psi (117.24 BAR) 119.55 kg/cm<sup>2</sup>
- Maximum Oil Flow: 15 gpm (57 l/min)
- Freespooling Clutch: Spring engaged/Optional  
Pneumatic P/N 5603
- **Short Drum:** 23" L x 8.25" D x 9.0" H  
(584.2mm L x 209.5mm D x 228.6mm H)
- Recommended Wire Rope: 7/16" (11mm) x 75' (23m)
- **Long Drum:** 25.5" L x 8.25" D x 9.0" H  
(647.7mm L x 209.5mm D x 228.6mm H)
- Recommended Wire Rope: 7/16" (11mm) x 100' (30m) long drum
- Drum Diameter: 3.5" (90mm)
- Drum Length: **Short Drum** 7.5" (190mm)
- Drum Length: **Long Drum** 10" (254mm)
- Roller Fairlead: Optional P/N 5600 (short drum) /  
5610A (long drum)
- Mounting Bolt Pattern: Side, Foot, Angle, Flatbed, or Low Mount
- Installed Weight: 84 lbs (38 kg) without wire rope
- Shipping Weight: 92 lbs (41.73 kg) without wire rope
- Limited One Year Warranty
- UPC: 0 22705 51701 0 / 0 22705 51781 2

### Performance (First layer on drum)

Line Speed FPM	MPM
30	(9.4)



**H11P****HYDRAULIC****H13P**

**Part Number:** 5364 (Short Drum)/5366 (Long Drum)  
**Application:** Vehicle Recovery/ Industrial/Marine/Military

### Specifications

- Rated Line Pull: 11,000 lbs (5,000 kg)
- Motor: High Torque
- Gearing: 2-Stage Planetary Differential
- Gear Ratio: 16:1
- Maximum Oil Pressure: 2,000 psi (137.93 BAR) 140.65 kg/cm<sup>2</sup>
- Maximum Oil Flow: 15 gpm (57 l/min)
- Freespooling Clutch: Spring engaged
- Brake: Automatic/100% Load Holding
- **Short Drum:** 28" L x 11.0" D x 10.0" H  
(711.2mm L x 279.4mm D x 254mm H)
- Recommended Wire Rope: 7/16" (11mm) x 75' (23m)
- **Long Drum:** 29.4" L x 11.0" D x 10.0" H  
(746.7mm L x 279.4mm D x 254mm H)
- Recommended Wire Rope: 7/16" (11mm) x 100' (30m)
- Roller Fairlead: Optional P/N 5610A (short drum) / 5620A (long drum)
- Drum Diameter: 4.0" (102mm)
- Drum Length: **Short Drum** 10" (254mm)
- Drum Length: **Long Drum** 11.4" (290mm)
- Mounting Bolt Pattern: Side, Foot, Angle, Flatbed, or Low Mount
- Installed Weight: 138 lbs (62.59 kg) without wire rope
- Shipping Weight: 154 lbs (70 kg) without wire rope
- Limited One Year Warranty
- UPC: 0 22705 0364 8 / 0 22705 0566 2

### Performance (First layer on drum)

Line Speed FPM (MPM)  
 38 (11.58)



**Part Number:** 5370 (Short Drum) / 5372 (Long Drum)  
**Application:** Vehicle Recovery/Industrial/Marine/Military

### Specifications

- Rated Line Pull: 13,000 lbs (6,000 kg)
- Motor: High torque
- Gearing: 2-Stage Planetary Differential
- Gear Ratio: 16:1
- Maximum Oil Pressure: 2,000 psi (137.93 BAR) 140.65 kg/cm<sup>2</sup>
- Maximum Oil Flow: 15 gpm (57 l/min)
- Freespooling Clutch: Spring engaged
- Brake: Automatic/100% Load Holding
- **Short Drum:** 28" L x 11.0" D x 10.0" H  
(711.2mm L x 279.4mm D x 254mm H)
- Recommended Wire Rope: 7/16" (11mm) x 75' (23m)
- **Long Drum:** 29.4" L x 11.0" D x 10.0" H  
(746.7mm L x 279.4mm D x 254mm H)
- Recommended Wire Rope: 7/16" (11mm) x 100' (30m)
- Roller Fairlead: Optional P/N 5610A (short drum) / 5620A (long drum)
- Drum Diameter: 4.0" (102mm)
- Drum Length: **Short Drum** 10" (254mm)
- Drum Length: **Long Drum** 11.4" (290mm)
- Mounting Bolt Pattern: Side, Foot, Angle, Flatbed, or Low Mount
- Installed Weight: 138 lbs (62.59 kg) without wire rope
- Shipping Weight: 154 lbs (70 kg) without wire rope
- Limited One Year Warranty
- UPC: 0 22705 05731 8 / 0 22705 05372 3

### Performance (First layer on drum)

Line Speed FPM (MPM)  
 30 (9.14)





**Part Number:** 5374 (Short Drum) / 5376 (Long Drum)

**Application:** Vehicle Recovery/Industrial/Marine/Military

### Specifications

- Rated Line Pull: 15,000 lbs (6,800 kg)
- Motor: High torque
- Gearing: 2-Stage Planetary Differential
- Gear Ratio: 16:1
- Maximum Oil Pressure: 2,000 psi (137.93 BAR) 140.65 kg/cm<sup>2</sup>
- Maximum Oil Flow: 15 gpm (57 l/min)
- Freespooling Clutch: Spring engaged
- Brake: Automatic/100% Load Holding
- **Short Drum:** 28" L x 11.0" D x 10.0" H  
(711.2mm L x 279.4mm D x 254mm H)
- Recommended Wire Rope: 1/2" (13mm) x 75' (23m)
- **Long Drum:** 29.4" L x 11.0" D x 10.0" H  
(746.7mm L x 279.4mm D x 254mm H)
- Recommended Wire Rope: 7/16" (11mm) x 100' (30m)
- Roller Fairlead: Optional P/N 5610A (short drum) / 5620A (long drum)
- Drum Diameter: 4.0" (102mm)
- Drum Length: **Short Drum** 10" (254mm)
- Drum Length: **Long Drum** 11.4" (290mm)
- Mounting Bolt Patten: Side, Foot, Angle, Flatbed, or Low Mount
- Installed Weight: 138 lbs (62.59 kg) without wire rope
- Shipping Weight: 154 lbs (70 kg) without wire rope
- Limited One Year Warranty
- UPC: 0 22705 05374 7 / 0 22705 05376 1

**Performance** (First layer on drum)

Line Speed FPM (MPM)  
27 (8.22)



**Part Number:** 5440B (Pneumatic) / 5440M (Manual)

**Application:** Vehicle Recovery/Industrial/Marine/Military

### Specifications

- Rated Line Pull: 20,000 lbs (9,080 kg)
- Motor: High torque
- Gearing: 2-Stage Planetary Differential
- Gear Ratio: 36:1
- Maximum Oil Pressure: 2,500 psi (172.41 BAR) 175.81 kg/cm<sup>2</sup>
- Maximum Oil Flow: 20 gpm (75 l/min)
- Freespooling Clutch: Spring engaged
- Brake: 100% Load Holding / Multi-disc / Spring applied / Hydraulic release
- Recommended Wire Rope: 5/8" (16mm) x 238' (72.5m)
- Load Control Valve: Standard
- Dimensions **Pneumatic:** 35.2" L x 17" D x 16.2" H  
(892.0mm L x 431mm D x 412mm H)
- Dimensions **Manual:** 36.4" L x 17" D x 16.2" H  
(927.0mm L x 431mm D x 412mm H)
- Drum Diameter: 7.7" (195mm)
- Drum Length: 11.69" (297mm)
- Mounting Bolt Patten: Foot, Flatbed, or Low Mounted
- Installed Weight: 436 lbs (197.77 kg) without wire rope
- Shipping Weight: 525 lbs (238.14 kg) without wire rope
- Limited One Year Warranty
- UPC: 0 22705 54492 3 / 0 22705 54403 0

**Performance** (First layer on drum)

Line Speed FPM (MPM)  
34 (10.3)



**H25P****HYDRAULIC****H30P****Part Number:** 5450B (Pneumatic) / 5450M (Manual)**Application:** Vehicle Recovery/Industrial/Marine/Military**Specifications**

- Rated Line Pull: 25,000 lbs (11,340 kg)
- Motor: High Torque
- Gearing: 2-Stage Planetary Differential
- Gear Ratio: 36:1
- Maximum Oil Pressure: 2,500 psi (172.41 BAR) 175.81 kg/cm<sup>2</sup>
- Maximum Oil Flow: 20 gpm (75 l/min)
- Freespooling Clutch: Spring engaged
- Brake: 100% Load Holding/Multi-disc/Spring applied /Hydraulic release
- Recommended Wire Rope: 11/16" (17.4mm) x 167' (51m)
- Load Control Valve: Standard
- Dimensions **Pneumatic:** 35.2" L x 17" D x 16.2" H  
(894.5mm L x 431mm D x 412mm H)
- Dimensions **Manual:** 36.5" L x 17" D x 16.2" H  
(929.5mm L x 431mm D x 412mm H)
- Drum Diameter: 7.7" (195mm)
- Drum Length: 11.69" (297mm)
- Mounting Bolt Patten: Foot, Flatbed, or Low Mount
- Installed Weight: 436 lbs (197.77 kg) without wire rope
- Shipping Weight: 525 lbs (238.14 kg) without wire rope
- Limited One Year Warranty
- UPC: 0 22705 54502 0 / 0 22705 54503 7

**Performance** (First layer on drum)

Line Speed FPM (MPM)  
28 (8.5)

**Part Number:** 5460B (Pneumatic) / 5460M (Manual)**Application:** Vehicle Recovery/Industrial/Marine/Military**Specifications**

- Rated Line Pull: 30,000 lbs (13,610 kg)
- Motor: High Torque
- Gearing: 2-Stage Planetary Differential
- Gear Ratio: 36:1
- Maximum Oil Pressure: 2,500 psi (172.41 BAR) 175.81 kg/cm<sup>2</sup>
- Maximum Oil Flow: 20 gpm 75 l/min)
- Freespooling Clutch: Spring engaged
- Brake: 100% Load Holding/Multi-disc/Spring applied /Hydraulic release
- Recommended Wire Rope: 3/4" (20mm) x 160' (48.76m)
- Load Control Valve: Standard
- Dimensions **Pneumatic:** 35.3" L x 17" D x 16.2" H  
(898.0mm L x 431mm D x 412mm H)
- Dimensions **Manual:** 36.7" L x 17" D x 16.2" H  
(933.0mm L x 431mm D x 412mm H)
- Drum Diameter: 7.7" (195mm)
- Drum Length: 11.69" (297mm)
- Mounting Bolt Patten: Foot, Flatbed, or Low Mount
- Installed Weight: 436 lbs (197.77 kg) without wire rope
- Shipping Weight: 525 lbs (238.14 kg) without wire rope
- Limited One Year Warranty
- UPC: 0 22705 54602 7 / 0 22705 54603 4

**Performance** (First layer on drum)

Line Speed FPM (MPM)  
27 (8.22)





## HYDRAULIC H45P

**Part Number:** (H45P) 654001, Pneumatic

Freespool / 654002, Manual Freespool

**Application:** Vehicle Recovery/Industrial/Marine/Military

### Specifications

- Rated Line Pull: 45,000 lbs (20,412 kg)
- Motor: High Torque
- Gearing: Heavy Duty 2-Stage Planetary
- Gear Ratio: 36:1
- Maximum Oil Pressure: 3,000psi (207 bar)
- Maximum Oil Flow: 25.1 gpm (95 l/min)
- Freespools Clutch: Manual Release Lever or Pneumatic
- Brake: Heavy-Duty Multi Disc Brake
- Recommended Wire Rope Diameter:  $\frac{3}{4}$ " (20mm)
- Recommended Rope Length: 197' (60m)
- Fairlead: Optional P/N 254001
- Cable Tensioner: Optional: P/N 5683
- Dimensions: 911mm L x 455mm W x 463mm H
- Drum Diameter: 195mm dia
- Drum Length: 297mm long
- 455mm Flanges
- Mounting Bolt Pattern: Foot, Flatbed or Low Mount
- Installed Weight: 199 kg (439 lbs) without wire rope
- Limited One Year Warranty

### Performance (First layer on drum)

Line Speed	FPM	(MPM)
	21.6	(6.6)



## SUPERWINCH Ltd.

In April 1987 Superwinch purchased FW Winches Limited, located in Tavistock, UK (formerly Fairey Winches), providing additional winch manufacturing capabilities including an overdrive transfer gearbox for the Toyota Land Cruiser, a drum and capstan winch for the Land Rover 110 as well as the original Husky. In addition, FW manufactured an wide range of hydraulic winches and a very unique trailer mounted twin capstan winch known as the Fairey TUG. Known as Superwinch, Ltd today, the tradition of design, engineering, testing and manufacturing of a broad range of winches from electric 12 and 24 volt planetary gear, right angle and worm gear units, to hefty hydraulic workhorses can be found in diverse industries and applications around the world.



**H9W****HYDRAULIC****H10W****Part Number:** 8588A**Application:** Vehicle Recovery/Industrial/Marine/Military**Specifications**

- Rated Line Pull: 9,000 lbs (4,082 kg)
- Motor: High torque
- Gearing: Worm & Worm-wheel Drive
- Gear Ratio: 54:1
- Maximum Oil Pressure: 1,800 psi (124 BAR) 126.58 kg/cm<sup>2</sup>
- Maximum Oil Flow: 12 gpm (45 l/min)
- Freespooling Clutch: Manual release lever
- Brake: Worm set, back-drive resistance
- Recommended Wire Rope: 3/8" x 100' (10mm) x (30m)
- Cable Tensioner: Optional P/N 5605
- Roller Fairlead: Optional P/N 8584
- Dimensions: 16.3"L x 15.2"D x 8.08"H  
(414mm L x 386mm D x 205.2mm H)
- Drum Diameter: 3.0" (76.2mm)
- Drum Length: 8.75" (222.25mm)
- Mounting Bolt Pattern: 10.8" x 4.92" (275mm x 125mm)
- Installed Weight: 52 lbs (23.6 kg) without wire rope
- Shipping Weight: 63 lbs (28.5 kg) without wire rope
- Limited One Year Warranty
- UPC: 0 22705 85881 6

**Performance** (First layer on drum)

Line Speed FPM	(MPM)
24	(7.3)

**Part Number:** 7085A (Not Available in UK/EU)**Application:** Vehicle Recovery/Industrial/Marine/Military**Specifications**

- Rated Line Pull 10,000 (4,535 kg)
- Motor: Rugged High Torque, low speed motor unit of proven reliability
- Gearing: Heavy Duty steel centered aluminum/bronze worm wheel
- Gear Ratio: 48:1
- Maximum Oil Pressure: 1,800 psi (124 bar)
- Maximum Oil Flow: 15 gpm (57 l/min)
- Freespooling Clutch – Manual Release
- Brake: Irreversible Worm Set, for substantial, reliable braking action
- Recommended Wire Rope Diameter: 7/16" (11mm)
- Recommended Rope Length: 129' (39 m)
- Fairlead: N/A
- Cable Tensioner: N/A
- Dimensions: 22" L x 16.25" D x 10" H (578mm L x 410mm D x 258mm H)
- Drum Diameter: 3.5" (89mm)
- Mounting Bolt Pattern: Foot, Flatbed or Low Mount
- Installed Weight: 112 lbs (51 kg) without wire rope and fairlead
- Shipping Weight: 123 lbs (56 kg)
- Limited One Year Warranty
- UPC: 0 22705 70801 2

**Performance** (First layer on drum)

Line Speed	FPM	(MPM)
	16	(4.8)





**Part Number:** 6760TD5

**Application:** Land Rover 110/130 TD5 (UK/EU Market Only)  
Complete with bumper

## Specifications

- Rated Line Pull: (3,600 kg)
- Motor: N/A – Power Take Off
- Gearing: Worm & Worm-Wheel Drive
- Gear Ratio: 48:1
- Freespooling Clutch: Manual release with safety interlock
- Brake: Irreversible worm and wheel
- Recommended Wire Rope: Minimum 11/32" (9mm) x 252' (77m)
- Recommended Wire Rope: Maximum 7/16" (11mm) x 150' (46m)
- Roller Fairlead: Optional P/N 5620A
- Dimensions: 22" L x 16.5" D x 10" H  
(558.8mm L x 418.1mm D x 254mm H)
- Drum Diameter: 3.5" (88.9mm)
- Drum Length: 11.25" (285.75mm)
- Mounting Bolt Pattern: 13.25" x 7.3125" (337mm x 186mm)
- Installed Winch Weight: 106 lbs (48.08 kgs) without wire rope
- Installed PTO Weight: 27 lbs (12.24 kg)
- Installed Bumper Weight: 53 lbs (24.29 kg)
- Installed Shafting Weight: 16 lbs (7.50 kg)
- Limited One Year Warranty

## Performance (First layer on drum)

Line Pull lb (kg)	Line Speed FPM (MPM)
Min inner rope layer	26 (8)



**Part Number:** 7080A

**Application:** Vehicle Recovery/Industrial/Marine/Military

## Specifications

- Rated Line Pull: 14,000lbs (6,350 kg)
- Motor: Rugged High Torque, low speed motor unit of proven reliability
- Gearing: Heavy Duty steel centered aluminum/bronze worm/wheel
- Gear Ratio: 48:1
- Maximum Oil Pressure: 1,800psi (124 bar)
- Maximum Oil Flow: 15 gpm (57 l/min)
- Freespooling Clutch: Manual Release
- Brake: Irreversible Worm Set, for substantial, reliable braking action
- Recommended Wire Rope Diameter: 1/2" (13mm)
- Recommended Rope Length: 129' (36m)
- Fairlead: N/A
- Cable Tensioner: N/A
- Dimensions: 22" L x 16.25" D x 10" H  
(578mm L x 410mm W x 258mm H)
- Drum Diameter: 3.5" (89mm)
- Mounting Bolt Pattern: Foot, Flatbed or Low Mount
- Installed Weight: 112 lbs (51 kg) without wire rope
- Shipping Weight: 123 lbs (56 kg)
- Limited One Year Warranty
- UPC: 0 22705 7080 2

## Performance (First layer on drum)

Line Speed	FPM	(MPM)
	10	(3)





# PREMIUM HUBS



Made in Brazil

**Superwinch Premium Hub Advantage.** Easy and quick engagement and disengagement. Always positive engagement, robust coil springs for reliability. All metal construction sealed to keep contaminants out. Fits many popular vehicles.

## CHEVROLET / GMC /GEO

Make/Model	Year	Count	Hub #	Notes
Blazer/Jimmy/Surburban	69-91	19 - Internal	400518	A
1/2 Ton Pickup	69-87	19 - Internal	400518	A
3/4 Ton Pickup	77-87	19 - Internal	400518	A
1 Ton Pickup	76-91	30 - Internal	400439	A
Geo Tracker	All	26 - 6	400538	

\*All 1988 Chevrolet pickups are equipped with an automatic system which cannot be converted.

## DODGE / CHRYSLER

1/2 Ton Pickup & Ramcharger	69-75	19 - Internal	404518
1/2, 3/4 Ton Pickup & Ramcharger	80-93	19 - Internal	404518
3/4 Ton Pickup	90-93	30 - Internal	400439
1 Ton Pickup (Dana 60)	90-93	30 - Internal	400439

## Ford

Bronco (not Bronco II)	66-96	19 - Internal	400518	A, C
1/2 Ton F100 Pickup	59-86	19 - Internal	400518	A
1/2 Ton F150 Pickup	59-96	19 - Internal	400518	A, C
3/4 Ton F250 Pickup (D-44)	59-75	19 - Internal	400518	A
3/4 Ton F250 Pickup (D-44)	78-86	19 - Internal	400518	A
3/4 Ton F250 Pickup (D-60)	78-97	30 - Internal	400439	A, C
1 Ton F350 Pickup	76-97	30 - Internal	400439	A, C
Super Duty F 250 & F 350	00-04	30 - Internal	400439	A
Ranger	90-97	27	400565	E
Explorer	90-94	27	400565	E

## International-Harvester

1/2 Ton Pickup	68-75	19 - Internal	400518
Travel All	68-75	19 - Internal	400518

## Isuzu

Trooper II	87-86	17 - 6	400533	D
AMIGO	87-99	17 - 6	400533	D
Rodeo	91-99	17 - 6	400533	D

## JEEP

CJ, Universal	81-86	27 - 5	400526	
J-10 Pickup	74-90	19 - Internal	400518	B
J-30 Pickup	77-90	19 - Internal	400518	B
WAGONEER, Cherokee, Gladiator	74-90	19 - Internal	400518	B

## Suzuki/Geo

Samurai, Sierra	82-94	26 - 6	400538
Sidekick/Tracker All	All	26 - 6	400538

**Parts**  
334401-06 10/32 Tapered Bolt Qty. 6

### CAUTIONARY FOOT NOTES:

- When replacing Fulltime 4WD, the (NP203 *only*), requires a conversion kit (see chart).
- Not compatible with Quatra Trac equipped models.
- When replacing automatic 3 hole cap screw hubs, one will need to convert their spindle nuts.
- One must obtain special snap ring (26 mm or 1 1/16), (Dealer item).
- When replacing automatic hubs with manual hubs, one must also change the spindle nuts.



PN: 400565



PN: 400518





# LP 8500



# LP 10000

**Part Number: 1585202 12V DC**

**Application:** Vehicle Recovery/Off Road /Utility  
**Specifications**

- Rated Line Pull: 8,500 lbs (3,856 kg)
- Motor: Sealed 4.5 hp (3.3 kW) Series Wound
- Gearing: 3-Stage Planetary
- Gear Ratio: 235:1
- Sealed Solenoid with Circuit Breaker
- Freespooling Clutch - Lever Shift
- Brake: Automatic/100% Load Holding
- Wire Rope 5/16" x 94' (7.9mm x 29m)
- Hook: Heavy Duty/Clevis Pinned/Latched
- Heavy Duty Powder Coated Hawse
- Remote Control 12' Rubber Hand-Held
- Dimensions: 21.3' L x 6.3" W 8.6" H  
(541mm L x 160mm W x 218.4mm)
- Drum Diameter: 2.5" (63.5mm)
- Drum Length: 8.8" (224mm)
- Mounting Bolt Pattern: 10" x 4.5" (254mm x 114.3mm)
- Installed Weight: 73 lbs (33.11 kg)
- Shipping Weight: 90 lbs (40.83 kg)
- Limited 2 Year Warranty
- UPC 0 22705 00340 7

**Performance** (First layer on drum)

Line Pull lb (kg)	Motor Amps	Line Speed FPM (MPM)
0	84	18 (5.5)
8,500 (3,856)	320	3.5 (1.1)

**Part Number: 1510200 12V DC**

**Application:** Vehicle Recovery/Off Road /Utility  
**Specifications**

- Rated Line Pull: 10,000 lbs (4,536 kg)
- Motor: Sealed 5.1 hp (3.8 kW) Series Wound
- Gearing: 3-Stage Planetary
- Gear Ratio: 235:1
- Sealed Solenoid with Circuit Breaker
- Freespooling Clutch - Lever Shift
- Brake: Automatic/100% Load Holding
- Wire Rope 3/8" x 85' (9.5mm x 25.9m)
- Hook: Heavy Duty/Clevis Pinned/Latched
- Heavy Duty 4-way Roller Fairlead
- Remote Control: 12' Rubber Hand-Held
- Dimensions: 21.3' L x 6.3" w 8.6" H  
(541mm L x 160mm W x 218.4mm)
- Drum Diameter: 2.5" (63.5mm)
- Drum Length: 8.8" (224mm)
- Mounting Bolt Pattern: 10" x 4.5" (254mm x 114.3mm)
- Installed Weight: 83 lbs (37.64 kg)
- Shipping Weight: 90 lbs. (40.83 kg)
- Limited 2 Year Warranty
- UPC 0 22705 00341 4

**Performance** (First layer on drum)

Line Pull lb (kg)	Motor Amps	Line Speed FPM (MPM)
0	90	16 (4.87)
10,000 (4,536)	350	1.52 (.46)



Utility  
& Multi





# WINCH MOUNTING SOLUTIONS

Superwinch's newly designed Jeep Mount Plate for the, CJ, YJ, and TJ models are what every Jeep owner has been waiting for. They are easy to mount for the do-it-yourself enthusiast and add rugged support so you can tackle the toughest terrain.

## TJ Jeep Mount Plate

**PN 2302290** - Fits EPI9.0S, Rock 98, EP6.0, EP9.0, EPI6.0, EPI9.0 and Talon 9.5 and 12.5 winch models

Designed to attach directly to TJ frame rails to ensure adequate support for winching activities. Unique design provides adequate clearance above stabilizer bar. Made of 1/4" steel with black power coat finish to resist corrosion. Includes mounting hardware.

(Note: Not For UK/EU Manufactured Vehicles)



2302290

## YJ Jeep Mount Plate

**PN 2302289** - Fits EPI9.0S, Rock 98, EP6.0, EP9.0, EPI6.0, EPI9.0 and Talon 9.5 and 12.5 winch models

Designed to attach directly to YJ frame rails to ensure adequate support for winching activities. Made of 1/4" steel with black power coat finish to resist corrosion. Includes mounting hardware.

(Note: Not For UK/EU Manufactured Vehicles)



2302289

## CJ Jeep Mount Plate

**PN 2302288** - Fits EPI9.0S, Rock 98, EP6.0, EP9.0, EPI6.0, EPI9.0 and Talon 9.5 and 12.5 winch models

Designed to attach directly to CJ frame rails to ensure adequate support for winching activities. Made of 1/4" steel with black power coat finish to resist corrosion. Standard 4.5" x 10' winch bolt pattern. Includes mounting hardware.

(Note: Not For UK/EU Manufactured Vehicles)



2302288

## Universal Winch Mount Plate

**PN 1665** - Fits EP9.0, EPI9.0, X9, S9000

(UK/EU PN 258001 Fits EP9.0, EPI9.0)



1665

## Talon Mounting Plate

**PN 216001** - Fits Talon 14 and 18

**PN 258001** - Fits Talon 9.5 and 12.5, (UK/EU only)



216001

## EP Mount Plate

**PN 2302287** - Fits EP12.5, EP16.5

**PN 258006** - (UK/EU) Part Number Fits EP12.5 and EP16.5



2302287

## LP Winch Mount Plate

**PN 2302292** - Fits LP8500 and LP10000 winch models

**PN 2302294** - Fits LP8500 (Mount Plate & Roller Fairlead)

**PN 258007** - Fits LP8500 and LP10000 (UK/EU only)



2302292





Made in U.S.A.

# SUPERWINCH ATV MOUNT KITS



\*Check [www.superwinch.com](http://www.superwinch.com) for latest application updates\*

**NOTE: TERRA 45 and UTV 4000 are not compatible with these mount plates - contact Superwinch for more details.**

ARTIC CAT	YEAR	SW PART #
1000 THUNDERCAT	08-11	2202873
700 4X4 (ALL including V2,H1)	07-12	2202873
650 4X4 (ALL including V2,H1, TRV,TBX)	05-10	2202873
650 4X4 V2	2004	2202380
550 4X4 (Including TRV)	09-12	2202873
500 4X4 (ALL Except 05 TRV)	05-09	2202873
500 4X4 TRV 2-UP	2005	2202380
500 4X4 (ALL Including TBX/TRV)	02-04	2202380
500 4X4 (ALL)	99-01	2202350
454 4X4 BEAR CAT	96-98	2202350
450 4X4 (Including TRV)	10-12	2202873
400 4X4 (ALL Including TBX/TRV)	06-10	2202873
400 4X4 (ALL Including TBX/TRV)	02-05	2202380
400 4X4	98-01	2202350
3754X4 AUTOMATIC	2002	2202380
366 4X4	08-09	2202897
300 4X4	02-05	2202380
300 4X4	98-01	2202350
250 2x4 / 4X4	2001	2202350
650 & 700 PROWLER 4X4 or H1 XTX	06-08	2202892

CAN-AM/BOMBARDIER	YEAR	SW PART #
800 OUTLANDER 4X4	06-11	2202893
800 OUTLANDER MAX 2-UP	06-11	2202893
650 OUTLANDER 4X4	06-11	2202893
650 OUTLANDER 4X4 MAX 2-UP	06-11	2202893
500 OUTLANDER MAX 4X4	07-11	2202893
500 OUTLANDER 4X4	07-11	2202893
400 OUTLANDER MAX 2-UP	04-11	2202865
400 OUTLANDER 4X4	03-11	2202865
330 OUTLANDER 4X4	04-05	2202865
COMMANDER 800 / 1000	11-12	2202913

HONDA	YEAR	SW PART #
TRX 650/680 RINCON (ALL)	03-12	2202867
TRX 500 FOREMAN	2012	2202910
TRX 500 FOREMAN / RUBICON	09-11	2202898
TRX 500 FORMAN / RUBICON (ALL)	07-08	2202878
TRX 500 FOREMAN E.S.	05-06	2202877
TRX 500 FOREMAN / RUBICON & GPSCAPE	05-06	2202879
TRX 500 FOREMAN / RUBICON (ALL)	01-04	2202379
TRX 475 FORMAN PS, EPS (FOOTSHIFT)	2009	2202898
TRX 450 FOREMAN 4X4 (ALL)	98-04	2202381
TRX 420 RANCHER (ALL)	07-11	2202889
TRX 400 RANCHER (ALL)	04-07	2202375
TRX 400 4X4	95-01	2202381
TRX 350 RANCHER (ALL)	00-06	2202375
TRX 300 2X4 / 4X4	93-00	2202352
TRX 250 RECON (ALL)	97-12	2202911
BIG RED	09-11	2202903

KAWASAKI	YEAR	SW PART #
750 BRUTE FORCE 4X4	05-12	2202881
700 PRAIRIE 4X4	04-06	2202382
650 BRUTE FORCE INDEPENDENT AXLE	2011	2202881
650 BRUTE FORCE STRAIGHT AXLE	06-09	2202899
650 BRUTE FORCE STRAIGHT AXLE	2005	2202875
KVF 650 PRAIRIE 4X4	02-03	2202382
360 PRAIRIE (ALL)	03-11	2202846
3010 MULE (4 DOOR)	09-11	2202902
4010 MULE DIESEL (2 & 4 DOOR)	05-07	2202868
KAF 550 MULE 4X4	2004	2202868
610 MULE	05-11	2202882
KAF 620 MULE 4X4	03-05	2202868
750 TERYX 4X4	08-11	2202891

POLARIS	YEAR	SW PART #
850 SPORTSMAN XP (INCLUDING TOURING)	09-11	2202900
800 SPORTSMAN 4X4	2011	2202900
800 SPORTSMAN 4X4	05-11	2202863
800 SPORTSMAN 800 X2 & TOURING TWO-UP	07-09	2202863
700 SPORTSMAN 4X4 X2 TWO-UP	2008	2202863
700 SPORTSMAN 4X4	02-07	2202863
600 SPORTSMAN 4X4	03-05	2202863
550 XP SPORTSMAN (AND TOURING X2)	09-11	2202900
500 SPORTSMAN 4X4 X2 TWO-UP	06	2202887
500 SPORTSMAN 4X4 X2 TWO-UP	07-09	2202863
500 ATP HO 4X4	04-05	2202872
500 HO SPORTSMAN	2011	2202900
500 SPORTSMAN 4X4	04-10	2202863
500 SPORTSMAN 4X4	96-03	2202872
500 SPORTSMAN 6X6	00-08	2202872
500 MAGNUM / XPLOER 4X4	97-00	2202872
455 DIESEL 4X4	99-00	2202872
450 SPORTSMAN 4X4	06-07	2202863
425 XPEDITION 4X4	2000	2202872
400 SPORTSMAN 4X4	04-05	2202863
400 SPORTSMAN 4X4	01-03	2202872
400 XPLOER 4X4	95-02	2202872
335 SPORTSMAN 4X4	98-00	2202872
330 ATP 4X4	04-05	2202872
325/330 MAGNUM 4X4	00-04	2202872
300 SPORTSMAN 4X4	08-10	2202912
300 HAWKEYE	06-07	2202912
RANGER RZR 900	2011	2202914
RANGER RZR 800 RZR-S	08-11	2202890
RANGER 500, 700, 6X6	03-09	2202871
RANGER 500 ('09), 700 XP ('09), 800 ('10)	09-10	2202894
RANGER 500 (ALL)	11-12	2202915
RANGER 400	10-11	2202915

SUZUKI	YEAR	SW PART #
750 KING QUAD	08-11	2202874
700 TWIN PEAKS	04-05	2202382
700 KING QUAD	05-07	2202874
500 VINSON 4X4 (ALL)	02-07	2202387
500 KING QUAD	09-11	2202874
450 KING QUAD	07-09	2202874
400 KING QUAD	08-11	2202895
400 EIGER (ALL)	02-07	2202387
620 4X4 Q.U.V.	2005	2202868

YAMAHA	YEAR	SW PART #
700 GRIZZLY 4X4 (ALL)	07-12	2202883
660 GRIZZLY 4X4	02-08	2202383
550 GRIZZLY (ALL)	09-11	2202883
450 GRIZZLY 4X4	07-12	2202866
450 WOLVERINE 4X4	06-09	2202896
450 KODIAK 4X4	03-06	2202866
400 BIG BEAR 4X4	07-11	2202886
400 BIG BEAR 4X4	00-06	2202377
400 KODIAK 4X4	03-05	2202866
400 GRIZZLY 4X4	2007	2202866
350 GRIZZLY 4X4	07-11	2202866
350 BRUIN 350 4X4	04-06	2202866
350 WOLVERINE 2X4	06-09	2202896
350 WOLVERINE 4X4	95-05	2202365
RHINO 700	08-12	2202908
RHINO 660	04-07	2202908
RHINO 450	06-09	2202908



Customer Service, U.S.A.  800 323 2031



Customer Service, U.K.  44(0) 1822 614101





# CRADLE MOUNTING KITS



## Cradle Mount, A Winch, Cradle, plus Receiver, System. The Portable Front and Rear Mounting Solution.



(winch not included)

**Easy on,  
Easy off  
Installation!**



Enjoy the flexibility the Superwinch Cradle can bring to your winching experience. Move winches from vehicle to vehicle, from the vehicles front to rear (with front 2" class III receiver hitch) or just conveniently remove the winch from the vehicle all together.

Bolt a winch to the Cradle and you're ready to simply place the mount into the receiver and pin. You're now ready to roll on cars, side by sides, pickups, trucks, vans and RVs.


The Superwinch Cradle mount is painstakingly crafted to strict quality standards and is comprised of high strength steel. The cradle handles the maximum hitch rating of line pull for effective winching.

#2055 Small Cradle  
(Fits LT 2000, S5000, S4000, S3000)

#2050  
Large Cradle (Fits 10" x 4.5" bolt pattern winches up to 9,000 lbs capacity)



Cradle Mounts have installation and safety advantages others don't.

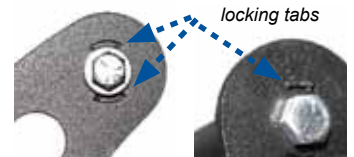

P/N 2055  
Small Cradle



P/N 2050  
Large Cradle





# SUPERMOUNT APPLICATION



Check [www.superwinch.com](http://www.superwinch.com) for latest application updates

Model	Style	Years	Part No.	Vert. Load	Line Pull	Install Time
<b>CHEVROLET</b>						
Pickup, Silverado	1500 LD 6.6 ft. Bed, 2 & 4 WD (Classic)	99 - 07	65023	500	9,000	20
Pickup, Silverado	1500 LD 8 ft. Bed, 2 & 4 WD (Classic)	99 - 07	65023	500	9,000	20
Pickup, Silverado	1500 HD 6.6 ft. Bed, 2 & 4 WD (Classic)	01 - 07	65028	500	9,000	20
Pickup, Silverado	2500 HD 6.6 ft. Bed, 2 & 4 WD (Classic)	01 - 07	65028	500	9,000	20
Pickup, Silverado	2500 HD 8 ft. Bed, 2 & 4 WD (Classic)	01 - 07	65028	500	9,000	20
Pickup, Silverado	3500 Series 8 ft. Bed, 2 & 4 WD (Classic)	01 - 07	65028	500	9,000	20
Pickup, Silverado	1500 LD 5.8 ft. Bed, 2 & 4 WD (Classic)	04 - 07	65023	500	9,000	20
Pickup, Silverado	1500 LD 5.8 ft. Bed, 2 & 4 WD (New Body Style)	07 - 12	65052	500	9,000	25
Pickup, Silverado	1500 LD 6.6 ft. Bed, 2 & 4 WD (New Body Style)	07 - 12	65052	500	9,000	25
Pickup, Silverado	1500 LD 8 ft. Bed, 2 & 4 WD (New Body Style)	07 - 12	65052	500	9,000	25
Pickup, Silverado	2500 HD 6.6 ft. Bed, 2 & 4 WD (New Body Style)	07 - 10	65050	500	9,000	40
Pickup, Silverado	2500 HD 8 ft. Bed, 2 & 4 WD (New Body Style)	07 - 10	65050	500	9,000	40
Pickup, Silverado	3500 HD 6.6 ft. Bed, 2 & 4 WD (New Body Style)	07 - 10	65050	500	9,000	40
Pickup, Silverado	3500 HD 8 ft. Bed, 2 & 4 WD (New Body Style)	07 - 10	65050	500	9,000	40
Suburban	All 1500 Series, 2 & 4 WD	00 - 06	65023	500	9,000	20
Suburban	All 2500 Series, 2 & 4 WD	00 - 06	65028	500	9,000	20
<b>DODGE</b>						
Dakota Pickup		00 - 04	65029	300	9,000	25
Durango		00 - 03	65029	300	9,000	25
Pickup, Ram, Full Size	1500 Only, All Models	02 - 05	65033	500	9,000	25
Pickup, Ram, Full Size	3500 HD, Inc. Mega Cab & Dually, 2 & 4 WD	03 - 09	65046	500	9,000	40
<b>FORD</b>						
E-150 Econoline Van	Full Size, All Models	91 - 07	65001	500	9,000	20
E-250 Econoline Van	Full Size, All Models	91 - 07	65001	500	9,000	20
E-350 Econoline Van	Full Size, All Models	91 - 07	65001	500	9,000	20
E-350 Econoline Van	RV Cutaway	91 - 07	65001	500	9,000	20
E-450 Econoline Van	RV Cutaway	91 - 07	65001	500	9,000	20
F-250 Super Duty	2WD (App. starts with 2008-1/2)	08 - 10	65049	500	9,000	20
F-250 Super Duty	4WD (App. starts with 2008-1/2)	08 - 10	65049	500	9,000	20
F-250 Super Duty	All Models	11 - 12	65049	500	9,000	20
F-350 Super Duty	2WD (App. starts with 2008-1/2)	08 - 10	65049	500	9,000	20
F-350 Super Duty	4WD (App. starts with 2008-1/2)	08 - 10	65049	500	9,000	20
F-350 Super Duty	All Models	11 - 12	65049	500	9,000	20
F-350 Super Duty Cab & Chassis	w/34" Wide Frames	99 - 07	65022	500	9,000	40
F-350 Super Duty Cab & Chassis	2WD (App. starts with 2008-1/2)	08 - 12	65049	500	9,000	20
F-350 Super Duty Cab & Chassis	4WD (App. starts with 2008-1/2)	08 - 12	65049	500	9,000	20
F-450 Super Duty	2WD (App. starts with 2008-1/2)	08 - 10	65049	500	9,000	20
F-450 Super Duty	4WD (App. starts with 2008-1/2)	08 - 10	65049	500	9,000	20
F-450 Super Duty	All Models	11 - 12	65049	500	9,000	20
F-450 Super Duty Cab & Chassis	w/34" Wide Frames	99 - 07	65022	500	9,000	40
F-450 Super Duty Cab & Chassis	2WD (App. starts with 2008-1/2)	08 - 12	65049	500	9,000	20
F-450 Super Duty Cab & Chassis	4WD (App. starts with 2008-1/2)	08 - 12	65049	500	9,000	20
F-550 Super Duty Cab & Chassis	w/34" Wide Frames	99 - 07	65022	500	9,000	40
F-550 Super Duty Cab & Chassis	2WD (App. starts with 2008-1/2)	08 - 12	65049	500	9,000	20
F-550 Super Duty Cab & Chassis	4WD (App. starts with 2008-1/2)	08 - 12	65049	500	9,000	20
<b>GMC</b>						
Pickup, Sierra	1500 LD 6.6 ft. Bed, 2 & 4 WD, Except Denali (Classic)	99 - 07	65023	500	9,000	20
Pickup, Sierra	1500 LD 8 ft. Bed, 2 & 4 WD, Except Denali (Classic)	99 - 07	65023	500	9,000	20
Pickup, Sierra	1500 HD 6.6 ft. Bed, 2 & 4 WD (Classic)	01 - 07	65028	500	9,000	20
Pickup, Sierra	2500 HD 6.6 ft. Bed, 2 & 4 WD (Classic)	01 - 07	65028	500	9,000	20
Pickup, Sierra	2500 HD 8 ft. Bed, 2 & 4 WD (Classic)	01 - 07	65028	500	9,000	20
Pickup, Sierra	3500 Series 8 ft. Bed, 2 & 4 WD (Classic)	01 - 07	65028	500	9,000	20
Pickup, Sierra	1500 LD 5.8 ft. Bed, 2 & 4 WD, Except Denali (Classic)	04 - 07	65023	500	9,000	20
Pickup, Sierra	1500 LD 5.8 ft. Bed, 2 & 4 WD (New Body Style)	07 - 12	65052	500	9,000	25
Pickup, Sierra	1500 LD 6.6 ft. Bed, 2 & 4 WD (New Body Style)	07 - 12	65052	500	9,000	25
Pickup, Sierra	1500 LD 8 ft. Bed, 2 & 4 WD (New Body Style)	07 - 12	65052	500	9,000	25
Pickup, Sierra	2500 HD 6.6 ft. Bed, 2 & 4 WD (New Body Style)	07 - 10	65050	500	9,000	40
Pickup, Sierra	2500 HD 8 ft. Bed, 2 & 4 WD (New Body Style)	07 - 10	65050	500	9,000	40
Pickup, Sierra	3500 HD 6.6 ft. Bed, 2 & 4 WD (New Body Style)	07 - 10	65050	500	9,000	40
Pickup, Sierra	3500 HD 8 ft. Bed, 2 & 4 WD (New Body Style)	07 - 10	65050	500	9,000	40
<b>JEEP</b>						
TJ	Canada	97 - 06	65048	300	9,000	25
Wrangler		87 - 95	65048	300	9,000	25
Wrangler	All, Inc. Unlimited	97 - 06	65048	300	9,000	25
YJ	Canada	87 - 95	65048	300	9,000	25
<b>TOYOTA</b>						
Sequoia		01 - 07	65031	500	9,000	40
Tundra		00 - 06	65031	500	9,000	40

## Switches



**2233B**  
Rocker Switch  
Fits T2000



**1519A**  
Repair Switch with  
3 ft. wire Pigtail fits  
T1500, S and X Series  
with direct switches



**1501B**  
Dash Mount Kit fits  
all X Series, EX1, X1  
and X2 Series winches



**1591**  
Three position heavy  
duty rotary switch for  
remote switching of  
EX1 - X2F Power Drives



**2270**  
15' Handheld Switch



**2271**  
30' Handheld Switch



**90-32471**  
Talon Ergo Handheld Switch



**90-32484**  
Talon Rubber Handheld Switch

**See more parts at**  
**[www.superwinch.com](http://www.superwinch.com)**

## Quick Connects



**1551**  
Fits winches  
up to 4,000 lbs

**2236**  
Fits winches 5,000 to 18,000 lbs

## Wiring Kits



**1520**  
Trailer Wiring Kit Fits -  
EX1, X1, X2, X3, S3000  
and S4000 winches



**2008**  
Trailer Wiring Kit Fits -  
5000 to 16,500 lbs winches with 25' Lead



**2007**  
Front Wiring Kit - Fits 5,000 to  
16,500 lbs winches with 5' Lead



**2302283**  
Solenoid Relocation Kit allows  
you to relocate the solenoid or  
solenoid control pack

## Portable Winch Mounts

**1559B**  
2" CLASS III Receiver  
Hitch Mount



**2060**  
Ball Hitch Mount



Fits: LT2000  
S Series  
GP Series

**2055**  
Small 2 bolt pattern  
Cradle Hitch Mount



Fits: LT2000  
S5000  
S4000  
S3000

**2050**  
Large 4 bolt pattern  
Cradle Hitch Mount



Fits: All Winches  
with 10" x 4.5"  
hole pattern,  
up to 9,000 lbs

## PULLEY BLOCKS

**2227A**  
8,000 lbs Pulley Block  
Fits- X1, X2, S3000 and  
all ATV winches



**2229A**  
10,000 lbs Pulley Block  
Fits - X3 and S5000  
(Not for Husky, X9, s9000)



**2212A**  
12,000 lbs Pulley Block  
for X6 and S6000  
(Not for Husky, X9, s9000)



**7754**  
ATV



**7750A**  
20,000 lbs Heavy Pulley Block  
for X9 and S9000, Talon 9.5, and Husky  
winches



**7755**  
36,000 lb  
Heavy Duty Pulley Block Fits EPI 16.5,  
Talon 14, 18 TS 11.5, TS 13.5, TS 15.5, 17.5





## Roller Fairleads

2549

Fits X6, X9, S6000  
and S9000  
winches  
11" x 3 3/4"



1560A

Fits EX1, X1, X2, X3  
winches

1560C

Fits all GP and T series  
winches



2235

Fits S Series winches  
5 1/4" x 3 1/4"



8584

Fits all Husky winches



2302293

Fits LP8500



90-32473

Fits Talon, 9,500 /  
12,500 / 14,000 and  
18,000 lbs winch



## Heavy Duty Hooks



90-24511

Latched Half-Link Hook For  
Synthetic Rope, fits Rock 98



90-24567

Latched Half-Link Hook  
for Synthetic Rope  
Talon, 14.0SR and 18.0SR



## CLEVIS HOOK

90-20435

Latched Clevis Hook  
for X9 and S9000  
WINCHES



## Hawse Fairleads

90-24507

Aluminium Hawse Fairlead  
for Talon



90-24509

Aluminium Hawse Fairlead  
for Rock 98



87-42619

Aluminium Hawse Fairlead  
for Terra 25 / Terra 35



87-42620

Aluminium Hawse Fairlead  
for Terra 45



## REPLACEMENT WIRE ROPE

For all winch models, only from Superwinch! Quality galvanized steel wire rope to resist corrosion and includes thimble steel channel that holds wire rope in a wide curve, protecting it from wear.



### Wire rope sizes

P/N	Wire Rope Length/Diameter	Winch Model
90-33473	7/16" x 90' (11.1mm x 27.4m)	EP16.5
90-33472	3/8" x 125' (9.5mm x 38.1m)	EP12.5, EP9.0
90-20506	21/64" x 100' (8.3mm x 30.5m)	EP6.0, EP9.0
90-20515	21/64" x 125' (8.3mm x 38.1m)	EP6.0, EP9.0
2537	3/8" x 90' (9.5mm x 27.4m)	Husky 10
2562	5/16" x 150' (7.9mm x 45.7m)	Husky 8.5
1580	5/16" x 100' (7.9mm x 30.5m)	X6, X9
90-12870	5/16" x 94' (7.9mm x 29.0m)	LP8500
1577A	1/4" x 50' (6.4mm x 15.2m)	S5000
1514A	7/32" x 60' (5.6mm x 18.2m)	S4000
1511C	3/16" x 60' (4.8mm x 18.2m)	S3000, WIAB
1511F	3/16" x 50' (4.8mm x 15.2m)	GP3000, WIAB PLUS, UT3000, Terra 25, LT3000 ATV
1535D	5/32" x 60' (3.9mm x 18.2m)	GP2300
87-19019	3/16" x 50' (4.8mm x 15.2m)	ATV3000, ATV2500
87-19039	7/32" x 50' (5.5mm x 15.2m)	UTV4000
1513	7/32" x 40' (5.6mm x 12.2m)	X2
1511	7/32" x 40' (5.6mm x 7.5m)	X1
1535	5/32" x 25' (3.9mm x 7.6m)	EX1
1535C	5/32" x 50' (3.9mm x 15.2m)	T2000, LT2000
87-42611	7/32" x 50' (5.5mm x 15.2m)	Terra 35
87-42612	1/4" x 55' (6.2mm x 16.76m)	Terra 45
90-12879	3/8" x 85' (9.5mm x 26m)	LP10000
90-24550	3/8" x 85' (9.5mm x 26m)	Talon 9.5, 12.5
90-24563	1/2" x 90' (13mm x 27.43m)	Talon 14, 18

See more parts at  
[www.superwinch.com](http://www.superwinch.com)

## SYNTHETIC ROPE

87-42613

50' 3/16" Dyneema®  
Synthetic Rope fits  
Terra 25 / Terra 35  
winch



87-42614

50' 1/4" Dyneema®  
Synthetic Rope fits  
Terra 45 winch and  
1440200SR



89-20521

40' 1/4" Synthetic Rope fits  
Danny O'Day S Series winch



90-24510

50' 3/8" Synthetic Rope  
fits,  
Rock 98  
winch



90-24506

80' 3/8" Synthetic Rope  
fits,  
Talon, 9.5  
and 12.5



90-24564

1/2" x 90' Talon 14 and 18  
winches



## Receiver Shackle Bracket

2546

Fits all Standard  
Class III  
Receiver Hitches



## SOLENOID - Single Pack

2237

Fits 12VDC  
X3, X6  
and S-6000



## BOW SHACKLES



**2538**  
Heavy-duty steel  
large capacity

**2302285**  
ATV Heavy-duty steel shackles

## RECOVERY STRAPS

- 2517** 2" x 20' strap; 15,600 lbs.
- 2518** 2" x 30' strap; 15,600 lbs.
- 1509** 2" x 6' strap; 15,600 lbs.
- 2531** 3" x 8' strap; 23,500 lbs.
- 2302284** 1" x 8' ATV strap; 8,000 lbs.  
Rated at ultimate strength.  
(Not available in UK or EU)



## CHAINS with GRAB HOOKS



**2541** 10' X 3/8" Chain  
(Not available in UK or EU)

## WINCH ROPE DAMPENER



**2570** DAMPENER will absorb winch rope energy if rope failure occurs when pulling a heavy load.  
Heavy duty vinyl with silver reflective tape for night time visibility features pockets for shackles, pulley block or straps.

## SMALL ACCESSORY KIT



**1554**  
10,000 lbs.  
Pulley Block,  
Nylon Carry Bag,  
Heavy Duty  
Leather Palmed  
Gloves

## LARGE ACCESSORY KIT



**2224**  
20,000 lbs.  
Pulley Block,  
Nylon Carry Bag,  
Heavy Duty  
Leather Palmed  
Gloves

## ATV ACCESSORY KIT



**2302286**  
•1 Bow Shackle  
•1" x 8' Tree-saver  
Strap  
•Rugged 600 denier  
polyester/pvc  
• Carry Bag  
•Heavy Duty  
Leather Palmed  
Gloves

## VINYL WINCH COVERS



**1566**  
Fits X6, X9 and Husky winches



**1505**  
Fits X3, X3F, S3000, S4000 and S5000 winches

## NEOPRENE WINCH COVERS



**1570**  
Talon 9.5, 12.5, Rock 98,  
LP8500, LP10000,  
Tiger Shark 9500, 11500  
and X9 winches



**1571**  
Talon 9.5i, and 12.5i,  
S9000  
and EP9 winches



**1572**  
Talon 14.0, 18.0,  
EP12, EP16 and  
Tiger Shark 13500, 15500, 17500 winches

## VINYL WINCH COVERS



**1504**  
Fits EX1, X1 and X2 winches

See more parts at  
[www.superwinch.com](http://www.superwinch.com)



## Superwinch® T-SHIRTS



00340  
Small - Black Superwinch T-Shirt

00341  
Medium - Black Superwinch T-Shirt

00342  
Large - Black Superwinch T-Shirt

00343 - Black Superwinch T-Shirt  
X Large - Black Superwinch T-Shirt

00344 - Black Superwinch T-Shirt  
XX Large - Black Superwinch T-Shirt

00345 - Black Superwinch T-Shirt  
XXX Large - Black Superwinch T-Shirt

## Superwinch® HEAVY DUTY GLOVES



90-22611

## Superwinch® HATS

P/N00335A



## HAND SAVER



2239



90-32472

## Superwinch® STICKERS

00320 White small 9"x 1.5"  
(228.6 x 38.1)mm

00321 Blue small 9"x 1.5"  
(228.6 x 38.1)mm

00322 White medium 14.5"x 2.25"  
(368 x 57.15)mm

00323 Blue medium 14.5"x 2.25"  
(368 x 57.15)mm

00324 White large 24.5"x 3.75"  
(622.3 x 95.25)mm

00325 Blue large 24.5"x 3.75"  
(622.3 x 95.25)mm

00326 White extra large 37"x5"  
(939.8 x 127)mm

00327 Blue extra large 37"x5"  
(939.8 x 127)mm



## S SERIES FREESPOOL KIT



89-10580

Replacement part for the SAC1000, S3000, S4000, & S5000 winches. Includes Shaft, Lever, Handle, and Rivet.

## LP8500 / LP10000 / UT3000 REMOTE



90-12864

Rubber coated handheld with toggle switch and 15' cord LP8500, LP10000, UT3000

## ATV UTILITY UPGRADE SWITCH KIT



2320200

Fits: LT2000

## ATV ACCESSORY KIT



2302201

Fits: LT2000

## S3 SOLENOID



90-14452 12VDC

90-14454 24VDC

Fits, EP, X9,  
S-9000 and  
Husky 10 (USA)

## LT2000 REMOTE



87-12869

Fits: LT2000 Winch



## The best protection in the business !

Superwinch proudly stands behind its products with the industry's best warranties. Several years ago we implemented an exclusive 3-year warranty on our robust S3 Solenoid. While most manufacturers use off-the-shelf solenoids designed for automotive use, the S3 Sealed Submersible Solenoid was designed by Superwinch engineers to outperform other solenoids on the market. We have now raised the bar with the game changing VS4 Solenoid (Vented, Submersible, and Stabilized with Sealed Socket). This is the best winch solenoid in the world and only available on the new Superwinch Talon Series. Covered by a Limited Lifetime Warranty which includes a 3-year warranty on all electrical components, the absolute BEST in the INDUSTRY!



### Limited Lifetime Warranty

Superwinch, LLC. warrants to the original retail buyer only that the mechanical components of all genuine SUPERWINCH® Winch Models shall be free from defects in materials and workmanship from the provable date of purchase of the new Product for the lifetime of the winch and the electrical components shall be free from defects in materials and workmanship for three (3) years from the provable date of purchase. Any Product that Superwinch determines to be defective will be repaired or replaced at Superwinch's sole discretion without charge to Buyer upon Buyer's compliance with these procedures. Seller or its Authorized Agent may make reasonable charges for parts and labour for repairs not covered by this Limited Warranty.



### Limited Lifetime Warranty

Superwinch, LLC. warrants to the original retail buyer only that the mechanical components of all genuine SUPERWINCH® Winch Models shall be free from defects in materials and workmanship from the provable date of purchase of the new Product for the lifetime of the winch, the electrical components shall be free from defects in materials and workmanship for one (1) year and the S<sup>3</sup> solenoid for three (3) years from the provable date of purchase. Any Product that Superwinch determines to be defective will be repaired or replaced at Superwinch's sole discretion without charge to Buyer upon Buyer's compliance with these procedures. Seller or its Authorized Agent may make reasonable charges for parts and labor for repairs not covered by this Limited Warranty.



### Limited Lifetime Warranty

Superwinch, LLC. warrants to the original retail buyer only that the mechanical components of all genuine SUPERWINCH® Winch Models shall be free from defects in materials and workmanship from the provable date of purchase of the new Product for the lifetime of the winch, the electrical components shall be free from defects in materials and workmanship for one (1) year. Any Product that Superwinch determines to be defective will be repaired or replaced at Superwinch's sole discretion without charge to Buyer upon Buyer's compliance with these procedures. Seller or its Authorized Agent may make reasonable charges for parts and labor for repairs not covered by this Limited Warranty.



### Limited Two-year Warranty

Superwinch, LLC. warrants to the original retail buyer only that mechanical components of the genuine SUPERWINCH® Winch Model shall be free from defects in materials and workmanship for (2) two years and electrical components for (1) one year from the provable date of purchase. Any Product Superwinch determines to be defective will be repaired or replaced at Superwinch's sole discretion without charge to Buyer upon Buyer's compliance with these procedures. Seller or its Authorized Agent may make reasonable charges for parts and labor for repairs not covered by this Limited Warranty.



### Limited One-year Warranty

Superwinch, LLC. warrants to the original retail buyer only that mechanical and electrical components of the genuine SUPERWINCH® Winch Model shall be free from defects in materials and workmanship for one year from the provable date of purchase. Any Product that Superwinch determines to be defective will be repaired or replaced at Superwinch's sole discretion without charge to Buyer upon Buyer's compliance with these procedures. Seller or its Authorized Agent may make reasonable charges for parts and labor for repairs not covered by this Limited Warranty.



### Limited One-year Motor ~ Three-year Gearbox Warranty

Superwinch, LLC. Power Drive products, except where noted, will carry a 3 year warranty on the Gearbox and 1 year Warranty on the motor against manufacturing defects only. This will be effective from date of sale to the end user. This warranty does not allow for abuse or overloading of the product. Superwinch will not repair or replace any part(s) under warranty that have become inoperative because of improper maintenance, eccentric loading, overloading, chemical or abrasive action, excessive heat or other abuse. Superwinch retains the right to replace or repair the units at its discretion. Superwinch will repair any parts proven to have been defective in material or workmanship under the warranty period and returned to Superwinch. Units or parts that have been altered or modified in any way without the written authorization of Superwinch will not be warranted. Superwinch shall not be responsible for incidental or consequential damages to property, loss of profits, loss of use or costs associated with the installation or removal of the product.

Inquiries: Any inquiries regarding compliance with warranties may be addressed in writing to Superwinch, LLC. or to Superwinch, Ltd, at the addresses noted below.

## Superwinch, LLC.

359 Lake Road  
Dayville, CT 06241  
U.S.A.

Tel: 1.800.323.2031

Fax: 1.860.963.0811

sales@superwinch.com

www.superwinch.com

The warranties set forth herein are exclusive  
and in lieu of all other warranties, whether oral  
or written, express or implied.

## Superwinch, Ltd.

Union Mine Road  
Pitts Cleave  
Tavistock Devon, UK  
PL19 0NS

Tel: 44 (0) 1822 614101

Fax: 44 (0) 1822 615204

sales@superwinch.net



## SUPERWINCH®



## 2012 SPONSOR



Jeep® Jamborees are off-road adventure weekends that bring together the outdoors, down-to-earth people, and their Jeep 4x4s. These off-road treks have a long tradition dating back to 1953 when 4x4 pioneer Mark A. Smith organized the first ever Jeep Jamboree and voyaged across the Sierra Nevada Mountains by way of the old Rubicon Trail. In 1954, Willys Motors — then manufacturer of Jeep vehicles — became involved with the adventure, and Jeep Jamborees have been an off-road tradition ever since.

A member of the Off-Road Hall of Fame and the Explorers Club, Mark A. Smith also led the 1978-79 Expedition de las Americas — a 20,000-mile odyssey from the bottom of South America to the top of North America, crossing the infamous Darien Gap — and headed the 1987 Camel Trophy in Madagascar. Since founding Jeep Jamboree USA in 1982, he's become a Jeep brand consultant and conducts intensive training for the U.S. Army Special Forces and various law-enforcement agencies. The Smiths' Jeep Jamboree USA conducts over 30 family-oriented Jeep 4x4 trips nationwide and is truly a family business. Daughter Jill, President and CEO, brings camaraderie and excitement to thousands of Jeep 4x4 owners annually, while son-in-law Pearse Umlauf, Vice President and General Manager, is focused on expanding Jeep Jamboree USA, which is the world's largest Jeep adventure company.

[www.jeeppjamboreeusa.com](http://www.jeeppjamboreeusa.com)

Jeep Jamboree USA, 2776 Sourdough Flat, Georgetown, CA 95634

530-333-4777 (phone) | 530-333-2844 (fax) Office hours 9 a.m. - 5 p.m. Pacific Time (Monday-Friday)





4-Wheeling America LLC, "I trust Superwinch" -B. Burke



## "I trust Superwinch" – Bill Burke, Bill Burke's 4-Wheeling America

Bill Burke is a professional guide and an internationally recognized trainer who teaches back country driving techniques, winching/extrication methods, vehicle preparation and maintenance, land navigation and woods' skills through classes, private training, trainer and trail leader courses, and back country trips to individuals, families, groups, clubs, vehicle manufacturers/dealers, tour operators, government agencies and all companies that use 4WD vehicles in their operations. Here is what Bill has to say about Superwinch:

"I was introduced to the Superwinch line over 25 years ago during my involvement with the Camel Trophy. I recognized a quality industrial grade product that could reliably withstand constant use and abuse.

I trust Superwinch to get me unstuck regularly in my work as a guide and 4WD trainer 24/7-365 in all weather conditions, roughest roads and in the most inhospitable areas. The solid state solenoid works every time, the 100% load holding brake keeps my rig steady on the steepest inclines and the strong gearing and drum mechanically have never failed to give me the confidence to use the winch in properly rigged recovery situations world-wide.

In my opinion, Superwinch is the most reliable and sturdy winch available - hands down! Thanks for making such a great product. Bill Burke

Find out more about Bill and his opinions on winches and winching at [www.bb4wa.com](http://www.bb4wa.com) or his YouTube channel: [www.youtube.com/user/bb4wa](http://www.youtube.com/user/bb4wa)



**Bill Burke's 4-Wheeling America LLC**  
**Premier Training. Guided Back Country Trips & Expeditions.**

For all users of 4-wheel drives and all skill levels. Driving Techniques. Recovery. Safety. Environmental Awareness. Tools. Trail Spotting. Navigation.

• Industrial • Government • Recreation

"The gold standard by which overland expedition training around the world is judged." Greg Hren, Photographer



Permitted  
Outfitter  
Guide  
USFS  
BLM







**Lead by Bruce Elfstrom, Overland Experts LLC (OEX)** has become a world-class training organization in the science and art of off-roading. Catering to the professional, recreational and military markets, Bruce Elfstrom knows off-roading – he’s been driving since he was 7. He’s navigated his way across four continents and has hundreds of OEX graduates in the field. Here’s an excerpt on what Bruce has to say about winch basics:

“In order to even contemplate using a winch, you will need several accessories. A fairly well-supplied winching bag includes the following: proper gloves; three D-shackles (9,500-17,000-pound working load or WL); three 3-inch straps (20,000-pound WL), three 5/16-inch pulley blocks (19,250 pounds WL) and one 50-foot 3/8-inch synthetic rope extension (19,700lbs WL). I prefer to use synthetic rope, which is stronger per unit measurement and lighter to carry. Synthetic rope does not burr or rust. It has less mass, and therefore holds less energy when it parts—less energy equals less damage. However, synthetic rope insulates the spool of the winch, compared to metal which conducts heat way from the spool. Winches that have the brake in the spool, or are designed to dissipate heat at the spool, can heat up dramatically with synthetic rope. The heat will compromise the winch and the rope at the same time.” –Overland Journal, Spring 2009

Bruce’s input on brake design keeps Superwinch ahead of the pack. Our synthetic rope winches feature both a brake away from the drum and an upgraded drum that can handle the added stress synthetic ropes generate. Superwinch is proud to partner with OEX.

Learn more about OEX and Bruce Elfstrom at [www.overlandexperts.com](http://www.overlandexperts.com), Telephone: (860) 873-9640

## Overland Experts - Established 1999

Off Road and 4x4 Driving Schools for Recreational, Military, and Industrial applications,  
4x4 Travel and Expeditions.

4x4 Consultation and Logistical Coordination for Government and NGO Relief Agencies,  
Film Production and Military Organizations.

<http://www.overlandexperts.com/>

<http://www.offroaddrivingschool.com/>





## Danny O' Day, "Worlds Fastest Wheelstander"




*"Whichever trailer you are loading there's a Superwinch designed to deliver the power to meet your needs."*

Danny O'Day is no stranger to racing. Recognized as the world's fastest man on two wheels (full quarter mile in just 8.7 seconds – that's over 150mph!), Danny has been sponsored by Superwinch for years, in fact, he sought Superwinch out. "We use the best stuff in our race car and Superwinch is a perfect match for that." "Whichever trailer you are loading, there's a Superwinch designed to deliver the power to meet your needs."

To learn more about Danny O'Day racing, follow him on Facebook, or contact Superwinch and we'll put you in touch with this racing legend.

Danny O'Day and Donna O'Day, Ashe County, NC 38632 / visit: [www.superwinch.com](http://www.superwinch.com) for race schedule.

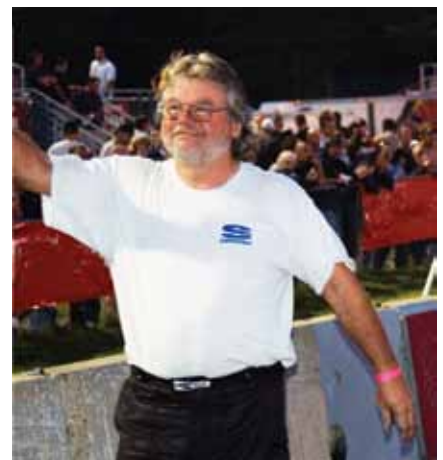





## Get Serious with Superwinch



### Serious about Synthetic:

*At Superwinch, we love synthetic.* The Synthetic rope used by Superwinch is a Dyneema® product, the strongest fiber in the world. Great care and caution is taken in sourcing of synthetic as the Superwinch Lab has found most synthetic on the market today to be unfit for winching. Users can trust their synthetic only if they trust the sourcing choices their manufacturer made.

*Is synthetic right for you?* The benefits of synthetic rope are many: lightweight, almost no retained energy – falls to the ground under failure, easy on the hands and it even floats. The downsides are less abrasion resistance, susceptible to heat build up (an issue for common, non-Superwinch winches with a brake in the drum). Superwinch sells synthetic into each market we serve from trailers to off-road to military and industrial work.



TERRA Series  
Dyneema®



TALON Series  
Dyneema®



### Serious about drums for Synthetic:

During the Superwinch Lab testing of synthetic rope, Superwinch discovered the rope puts a very different strain on drums compared to wire cable. Where the wire will layer on top of layer, synthetic ropes wants to dive between layers. The result is broken cast aluminum drums. That's why Superwinch developed special reinforced steel drums on our Talon, Terra and select S series winches. Only winches from these series are approved for both wire and synthetic. Updating older winches to synthetic is not recommended as the unique forces synthetic ropes put on drums goes beyond their intended capacities.



Standard S Series  
cast aluminum  
drum for wire rope



Steel S Series  
drum for  
synthetic rope



AmSteel®-Blue is a torque-free 12-strand single braid that yields the maximum in strength-to-weight ratio and, size for size, is the same strength as steel—yet it floats. AmSteel®-Blue out lasts wire 3:1, making it an excellent wire rope replacement. It has extremely low stretch and superior flex fatigue and wear resistance. Samthane coating enhances that already high abrasion and cut resistance.



INCH	MM	LBS/100 FT	KG/100M	SAMSON AVERAGE STRENGTH LBS	SAMSON AVG STRENGTH KG	SAMSON MIN STRENGTH LBS	SAMSON MIN STRENGTH KG	ISO/BS EN919 METRIC TONNES
3/16	5	1	1.5	5,400	2,400	4,900	2,200	2.4
1/4	6	1.6	2.4	8,600	3,900	7,700	3,500	3.9
3/8	9	3.6	5.4	19,600	8,900	17,600	8,000	8.9
1/2	12	6.4	9.5	34,000	15,400	30,600	13,900	15.4

### Serious about EN14992-1 & Machinery Directive 2006/42/EC

Superwinch, Ltd is the only manufacturer in the world currently offering a full range of both electric and hydraulic winches that are EN14992-1 compliant. The Superwinch PRO Series conforms to BS EN14492-1 POWER DRIVEN WINCHES and MACHINERY DIRECTIVE 2006/42/EC. For impartial professional informed advice on EN 14492-1 regarding your requirements and responsibilities please contact Superwinch, Ltd Customer Service on 01822 614101.

# get serious



## SUPERWINCH



Tel: 1.800.323.2031



[www.superwinch.com](http://www.superwinch.com)



Tel: +44 (0) 1822 614101



### Superwinch, LLC

359 Lake Road

Dayville, CT USA 06241

Tel: 1.800.323.2031

Fax: 1.860.963.0811

[sales@superwinch.com](mailto:sales@superwinch.com)

[www.superwinch.com](http://www.superwinch.com)



### Superwinch, Ltd

Union Mine Road

Pitts Cleave

Tavistock Devon, UK

PL19 0NS

Tel: +44 (0) 1822 614101

Fax: +44 (0) 1822 615204

[sales@superwinch.net](mailto:sales@superwinch.net)

[www.superwinch.com](http://www.superwinch.com)



SUPERWINCH®, SUPERWINCH®, (design) and S Superwinch® (design) are registered trademarks of Superwinch, LLC. Husky™, Winch-In-A-Bag™, Terra™, Talon™, Tiger Shark™ are trademarks of Superwinch. Specifications subject to change at any time. All photographs shown are copyrighted material. Reproduction in any way is prohibited without permission of Superwinch or the copyright owner.

P/N 00201